



目录 CONTENTS

燃油供给系统 Fuel Oil Supply System	05	厨房电器设备 Kitchen Electrical Equipment	25
电加热装置 Electric Heating Device	08	◆ 电磁灶 Electromagnetic Range	26
◆ 电加热器 Electric Heater	09	◆ RZ系列电灶 RZ Series Electric Cooking Range	28
◆ 电加热管、电加热盘 Electric Heating Tube / Electric Heating Plate	13	◆ 电烤箱 Electric Bake Oven	30
◆ 电热温水炉 Electric Water Heater	14	◆ 蒸饭箱 Rice Cooking Box	32
◆ 电暖器、电热风器 Electric Radiator / Electric Air Heater	15	◆ 可倾式电炒锅 Tilting Electric Frying Pan	34
智能化节能设备 Intelligent Energy-saving Equipment	16	◆ 可倾式电热汤锅 Tilting Electric Warming Soup Pot	36
◆ 舱柜节能系统 Tank Energy Saving System	17	◆ 电蒸汽两用饭锅 Electric/Steam Rice Cooker	37
◆ 变频节能系统 Frequency Conversion Energy Saving System	19	◆ 电热保温台 Electric Bain-Marie	38
◆ 燃油均质机 F.O. Homogenizer	21	◆ 带灭火系统电炸炉 Electric Fryer With Fire Extinguishing System	40
◆ 滑油（液压油）净化处理装置 Cleaning Equipments For Lube(Hydraulic)Oil	23	◆ 电炸炉 Electric Fryer	41
		◆ 电烤煎锅 Electric Grill and Griddle	42

目录 CONTENTS

◆ 电饼铛 Electric Baking Pan	43	◆ 消毒柜 Sterilizer	58
◆ 电热开水器 Electric Boiled Water Utensil	44	◆ 饮水机 Water Dispenser	59
◆ 燃油汽化灶 Diesel Gas Range	45	◆ 土豆去皮机 Potato Peeler	59
◆ 厨房废物粉碎机 Kitchen Waste Pulverizer	46	◆ 斜刀切片机 Meat Slicer	59
◆ 厨房多用机 Kitchen Multi-function Machine	47	◆ 绞肉机 Meat Mincer	60
◆ 万能蒸烤箱 Combi Oven	48	◆ 锯骨机 Bone Saw	60
不锈钢家具 Stainless Steel Furniture	49	◆ 和面机 Dough Kneading Machine	60
配套设备 Other Equipment	55	◆ 冰箱 Refrigerator	61
◆ 洗衣机 Washing Machine	56	◆ 冷藏 / 冷冻工作台 Refrigeration / Freezing Table Counter	61
◆ 干衣机 Dryer	56	◆ 制冰机 Ice Maker	62
◆ 洗干一体机 Washer&Dryer	56	◆ 微波炉 Microwave Oven	62
◆ 工业型洗脱机 Industrial Washing Machine	57	◆ 咖啡机 Coffee Machine	62
◆ 工业型烘干机 Industrial Dryer	57	◆ 多士炉 Toaster	63
◆ 洗碗机 Dish Washer	58	◆ 船用垃圾打包机 Marine Garbage Baler	63

Fuel Oil Supply System 燃油供给系统




一种基于燃油的电、蒸汽一体粘度控制系统
专利号：ZL2020204856093

工作原理 PRINCIPLE

燃油供给系统（也称为燃油供应单元）是船舶必需之设备，在它出现之前，燃油供应的所有部件均分散布置在机舱内，模块化是将所有部件组装成一个整体，方便了船厂的安装、缩短了工期，同时也极大方便了船员的操作与管理。燃油供应单元为柴油机实现HFO、MDO、MGO等不同油品的平稳切换，并给柴油机提供所需要的一定流量、压力，合适的粘度以及高清洁的燃油。

The fuel supply system (also known as fuel supply unit) is a necessary equipment ships. Before the fuel supply unit appears, all parts of the fuel supply are scattered in the engine room. The emergence of the fuel supply unit has improved this situation, integrating all component systems into a whole and unifying and managing it. It supplies oil to the engine and has the functions of fuel (HFO, MDO, MGO) conversion, pressure control, viscosity control, filtering and so on.

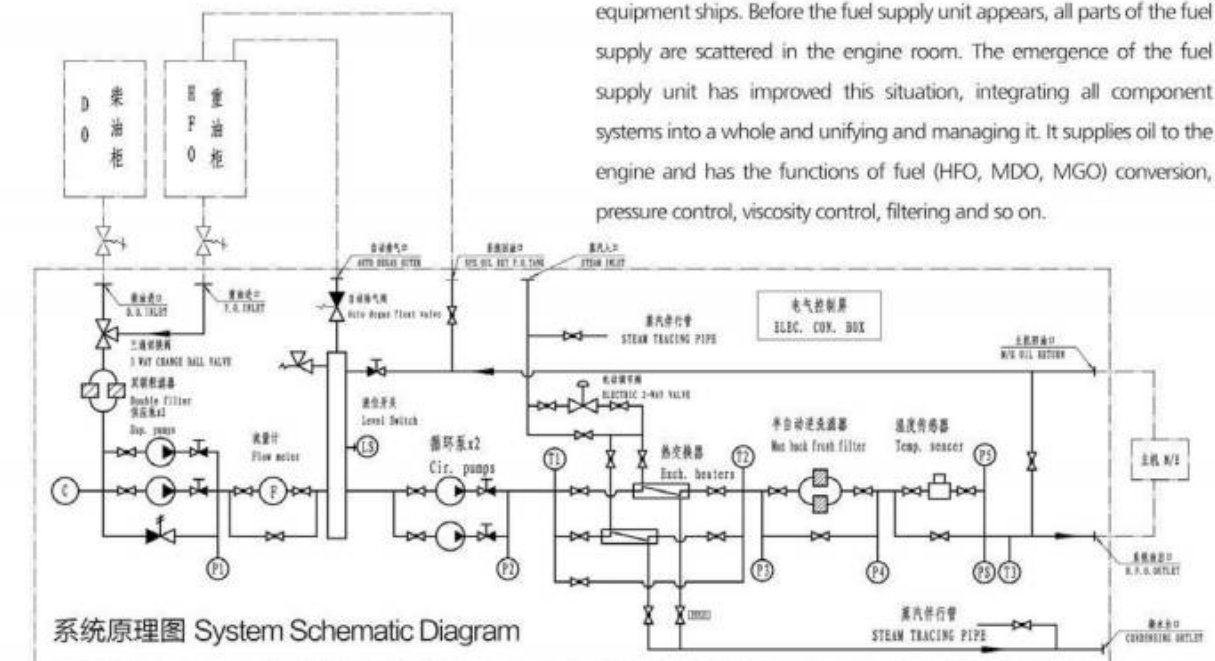

■ 系统特点 FEATURES

- 1、专业化的设计
与世界首家供油单元德国KUPKE+WOLF合作，专业化的设计及服务团队，为客户提供可靠的产品及优质服务。
 - 2、HFO/MDO/MGO通过PLC精确控制，实现燃油转换对温度、粘度的平稳过渡。
 - 3、高集成化PLC控制，具有报警、故障诊断等人工智能功能。
 - 4、单元内可选择配置电加热器，当没有蒸汽或蒸汽量不足时，实现对燃油的加热。通过粘度（或温度）信号实现对蒸汽阀及电加热器的控制，并能智能选择蒸汽优先的原则，即只有当蒸汽不足时电加热器才工作。（专利技术）。
 - 5、单元内可选择配置均质机，对燃油进行细化、均质处理，降低燃油表面张力，提高燃油的燃烧效果，减少有害排放。
1. Cooperated with the world's earliest fuel supply unit KUP-KE+WOLF in Germany, professional design and rich experience service team, can supply reliable products and excellent service.
 2. HFO/MDO/MGO can be changed over smoothly according engine requirements such as temperature and viscosity by PLC.
 3. Highly integrated PLC control with artificial intelligence functions such as alarm and fault diagnosis.
 4. Using both electrical heater and steam (or thermal oil) heater in the fuel oil supply module. The running of electrical heater and steam control valve controlled with the viscosity (or temperature) signal. The electrical heater is the backup heating source which will only be started to complement the amount of steam. (Patented technology)
 5. Homogenzier can be adopted in the unit, the soft sludge in the FO can be homogenized and refined, fuel surface tension reduced, so improving fuel combustion efficiency and reduce harmful emissions.

■ FSS系列燃油供给系统选型表 FSS SERIES SELECTION TABLE

型号 Type	适用发动机功率范围 Power range (PS / kW)	各种警报功能 Various alarm functions	重量 Weight (t)	长×宽×高 L×W×H (mm)
FSS-2000	0-2000 / 0-1470	按用户要求设置	1.6	2350X1250X1700
FSS-2040	2000-4000 / 1470-2940		2	2500X1300X1750
FSS-4065	4000-6500 / 2940-4780		2.5	2700X1350X1800
FSS-65100	6500-10000 / 4780-7360		3	3000X1400X2000
FSS-100150	10000-15000 / 7360-11000		3.8	3500X1500X2300

■ FCS系列燃油净化系统选型表 FCS SERIES SELECTION TABLE

型号 Type	适用发动机功率范围 Power range (PS / kW)	主机额定消耗量 Rated Consumption (L/h)	重量 Weight (t)	长×宽×高 L×W×H (mm)
FCS-2000	0-2000 / 0-1470	≤315	1.1	1800X1000X1700
FCS-2040	2000-4000 / 1470-2940	300-630	2.2	2400X1300X1800
FCS-4065	4000-6500 / 2940-4780	600-1050	2.5	3000X1600X2100
FCS-65100	6500-10000 / 4780-7360	1000-1500	3.5	3400X1600X2300
FCS-100150	10000-15000 / 7360-11000	1400-2100	3.8	3500X1700X2300

■ LCS系列滑油净化系统选型表 LCS SERIES SELECTION TABLE

型号 Type	适用发动机功率范围 Power range (PS / kW)	主机需处理量 Throughput (L/h)	重量 Weight (t)	长×宽×高 L×W×H (mm)
LCS-2000	0-2000 / 0-1470	≤400	1.2	1400X1400X1700
LCS-2040	2000-4000 / 1470-2940	400-750		
LCS-4065	4000-6500 / 2940-4780	750-1050	2.0	1800X1800X2000
LCS-65100	6500-10000 / 4780-7360	1050-1400		
LCS-100150	10000-15000 / 7360-11000	1400-1760		

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

Electric Heating Device



电加热装置

公司生产各种规格的电加热器，可分别用于加热水、空气、油和其它介质，具有智能控制、热效率高、使用寿命长、安装维护方便等特点，广泛用于各种加热设备。

Electric heaters of various specifications produced by the company can be used for heating water, air, oil and other media, It has the characteristics of intelligent control, high thermal efficiency, long service life and convenient installation and maintenance, widely used in all kinds of heating equipment.

Electric Heater



电加热器



一种基于船用燃油电加热器的两级控制方法
专利号：ZL2020102630275

一种基于船用燃油电加热器的多级控制方法
专利号：ZL2020102629691

一种加热元件过渡套管
专利号：ZL201922287097X




■ 工作原理 PRINCIPLE

燃油电加热装置包含本体及控制箱。本体内部安装了加热管限温温控及油温限温温控。外部安装有安全阀、压力开关及温度传感器。控制箱内安装有PLC、触屏等智能控制器件。控制方式有自动控制、手动多级控制，自动模式下，根据控制信号自动调整各接触器的动作调整输出功率，不依赖传统的功率调整模块实现大功率燃油加热装置的无级调功，提高控温精度，减小温度的波动，降低对电网的冲击。

The fuel electric heating device consists of heater and control box. There are two temperature switches inside of heater, one of them is located on the heating tube and the other one is located in the fuel oil. There are safe valves, pressure switches and temperature sensors be installed outside of heater. The PLC, touch screen and other intelligent control devices installed in the control box which can detect and control heating elements in the heater by automatic control, manual multi-stage control method. According to the control signal PLC automatically adjust the movement of contactors in auto mode, so as to adjust the output power and realize the power stepless regulating, in this way improve the temperature control accuracy, and reduce the impact on the power grid.

船舶锚泊期间, 为您提供全方位电加热方案!
We Can Provide You With All Around Electric Heating Proposal, During The Vessel Mooring

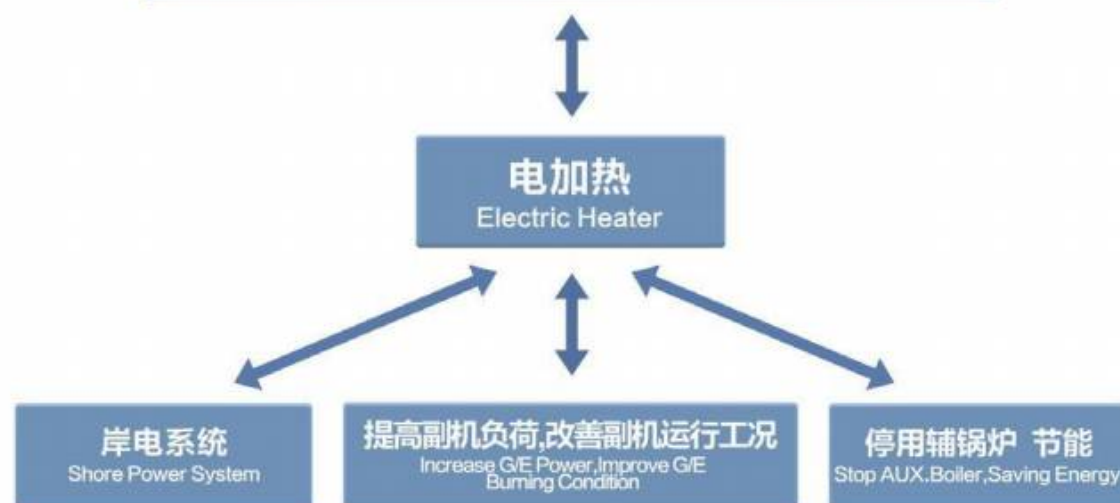

基本应用 APPLICATION

- 1、通过电加热装置, 对燃油日用柜和沉淀柜进行保温;
- 2、通过电加热装置, 对主辅机供油系统的燃油或滑油进行加温;
- 3、通过电加热装置, 对主机缸套水进行保温(暖缸);
- 4、通过电加热装置, 在冬季时对空调系统的空气进行加温, 改善船员生活环境。

By using the ALG Marine Electric Heaters during the mooring period, ships significantly reduce or even eliminate the necessity of operating the auxiliary boiler.

1. Warming fuel oil (F.O.) in the service tank and settling tank;
2. Warming the fuel oil or lubricating oil service system for the M/E and G/E;
3. Warming the jacket water for the M/E;
4. During winter, enhance crew's comfort level by warming the air conditioning outflow air.

性能特点 FEATURES

- 1、设备体积小, 便于安装及维护;
- 2、设备操作简单、运行安全可靠;
- 3、通过PLC控制无级调功, 精度高, 对电网的冲击小;
- 4、四层防护, 彻底消除安全隐患;
- 5、使用管板自动焊接工艺, 确保加热管不泄漏。

1. Small size, easy to install and maintain;
2. Easy control, safe and reliable operation;
3. Stepless adjustable power, high precision temperature control and small impact on the power grid;
4. Four barriers protection, thoroughly eliminates potential dangers;
5. Using tube-plate automatic welding process, to ensure the heating tube no leakage.



【管板自动焊接工艺】
Automatic welding process of tube-plate

RYW系列燃油电加热器选型表 RYW SERIES SELECTION TABLE

型号 TYPE	功率 POWER	本体外形尺寸 DIMENSIONC (Φ×H)	控制箱外形尺寸 CONTROL BOX DIMENSION(W×H×D)	元件数 (根/组) ELEMENT(pcs/group)
RYW-6	6kW	Φ320 × 1060	400x500x220mm	12/1,2
RYW-9	9kW	Φ320 × 1230	500x650x220mm	12/2,4
RYW-12	12kW	Φ320 × 1400	500x650x220mm	12/2,4
RYW-15	15kW	Φ320 × 1570	500x650x220mm	12/2,4
RYW-18	18kW	Φ360 × 1230	500x650x220mm	24/4
RYW-24	24kW	Φ360 × 1400	500x650x220mm	24/4
RYW-30	30kW	Φ360 × 1570	500x650x220mm	24/4
RYW-36	36kW	Φ420 × 1400	600x800x280mm	36/4
RYW-42	42kW	Φ420 × 1500	600x800x280mm	36/4
RYW-50	50kW	Φ460 × 1400	600x800x280mm	48/5
RYW-60	60kW	Φ460 × 1525	600x800x280mm	48/5
RYW-70	70kW	Φ460 × 1650	600x800x280mm	48/5
RYW-80	80kW	Φ500 × 1500	600x800x280mm	60/6
RYW-90	90kW	Φ500 × 1600	600x800x280mm	60/6
RYW-100	100kW	Φ500 × 1700	600x800x280mm	60/6
RYW-120	120kW	Φ500 × 1850	600x800x280mm	60/6

RSF系列淡水电加热器选型表 RSF SERIES SELECTION TABLE

型号 TYPE	电压 Voltage	功率 Power	外形尺寸 A Dimension B	加热介质 Heating medium
RSF-3	3-220V 3-380V 3-415V 3-440V	3kW	400mm 320mm	水
RSF-4		4kW	460mm 380mm	
RSF-5		5kW	480mm 400mm	
RSF-6		6kW	500mm 420mm	
RSF-7		7kW	530mm 450mm	
RSF-8		8kW	560mm 480mm	
RSF-9		9kW	600mm 520mm	
RSF-10		10kW	620mm 540mm	
RSF-11		11kW	650mm 570mm	
RSF-12		12kW	680mm 600mm	
RSF-15		15kW	710mm 630mm	
RSF-18		18kW	740mm 660mm	

用户如有特殊要求, 可按用户要求定制。亦可代为用户设计
If users have special requirements, it can be customized according to user requirements. It can also be designed for users



【RYW-4 定制型】



【RYF型】



【RSF型】



【防爆电加热器】

Ex-proof Heater

Ex d IIC T3 Gb

RYF系列油柜电加热器选型表 RYF SEIRES SELECTION TABLE

型号 TYPE	功率 POWER	本体外形尺寸 DIMENSIONC (Φ×L×H)	控制箱外形尺寸 CONTROL BOX DIMENSION(W×H×D)	元件数 (根/组) ELEMENT(pcs/group)
RYF-9	9kW	265 × 600 × 180mm	400x500x200mm	12/2
RYF-12	12kW	265 × 700 × 180mm	400x500x200mm	12/2
RYF-15	15kW	265 × 850 × 180mm	400x500x200mm	12/2
RYF-18	18kW	265 × 1000 × 180mm	400x500x200mm	12/2
RYF-24	24kW	265 × 1200 × 180mm	400x500x200mm	12/2
RYF-30	30kW	420 × 800 × 150mm	450x550x200mm	24/4
RYF-36	36kW	420 × 950 × 150mm	450x550x200mm	24/4
RYF-42	42kW	420 × 950 × 150mm	450x550x200mm	36/4
RYF-50	50kW	420 × 1000 × 150mm	450x550x200mm	36/4
RYF-60	60kW	420 × 1150 × 150mm	450x550x200mm	36/4


可按用户需求提供防爆型

Explosion-proof type can be provided according to user requirements

Electric Heating Tube/Electric Heating Plate



电加热管/电加热盘

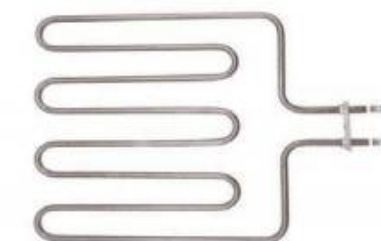

可根据用户特殊要求设计制作，亦可根据用户提供的图纸生产

It can be designed and made according to the special requirements of users, It can also be produced according to the drawings provided by users

Electric Water Heater



RGW-400L



RGW-300L

- ◆ 采用电加热，是一种储能式热水供应器，具有升温快、无明火、清洁卫生、无污染等特点。

Electric Water Heaters is a hot water supply furnace of energy storage style with electric heating which has the characteristics of no naked fire, warm-up fast, sanitation and hygiene, and pollution-free etc.



控制箱
Control Box


型号 Model	容积 Cubage	工作压力 Working Pressure	额定电压 Rated Voltage	加热器数量 Qty. of the heaters	额定功率 Rated Power	温度控制 Temperature Control	外形尺寸 (D×H) External Dimension	重量 Weight
RGW-100L	100L	≤0.4Mpa	3~220V 3~380V 3~415V 3~440V	1	5kW	85±5℃	Φ500×~1140mm	100kg
RGW-150L	150L			2	9kW		Φ500×~1710mm	120kg
RGW-200L	200L			2	12kW		Φ500×~1810mm	155kg
RGW-300L	300L			2	12/18kW		Φ600×~1600mm	155kg
RGW-400L	400L			3	36kW		Φ700×~1670mm	155kg

Electric Radiator / Electric Air Heater




RNP-2/3

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 冬季室内取暖及仓库干燥使用
Indoor heating and dry use of warehouse in winter
- ◆ 热量调控，散热温和，使用寿命长
Heat regulation, mild heat dissipation, long service life
- ◆ 无噪音、结构强度高、耐震动、外形美观
No noise, high structural strength, vibration resistance, beautiful appearance

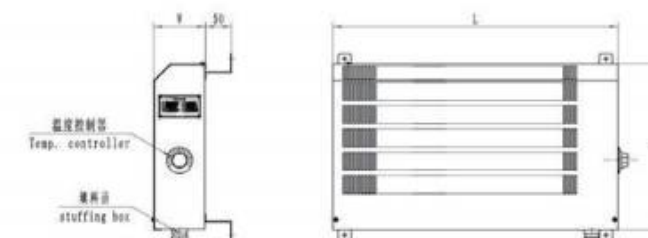

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	外形尺寸 (L×W×H) External Dimension	重量 Weight
RNP-2	~110/220V	0.5~1.5kW	550×100×320mm	13kg
		2kW	550×100×500mm	15kg
RNP-3	3~220/380/415/440V	1.5~5kW	550×100×500mm	15kg

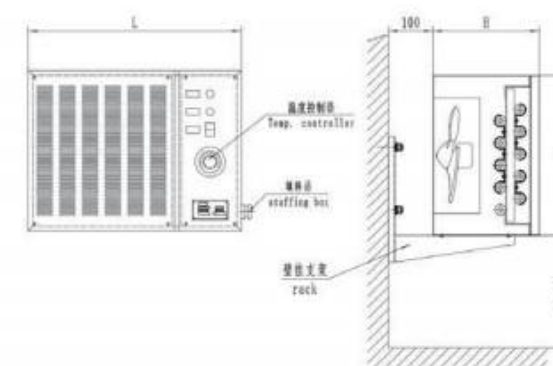

RNF-2/3

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	外形尺寸 (L×W×H) External Dimension	重量 Weight
RNF-2	~110/220V	1~2kW	500×400×235mm	16kg
RNF-3	3~220/380/415/440V	3~10kW	600×500×240mm	24kg
		11~15kW	800×600×270mm	60kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request


Intelligent Energy-saving Equipment



智能化节能设备

随着世界经济的发展和一体化进程的加快，海洋运输业将发挥更大的作用。走“绿色造船”的发展之路是大势所趋。力诚集团致力于节能减排设备的研发，从燃油、电热锅炉、滑油、冷却水以及绝热保温等方面为您提供全方位的解决方案。

With the development of the world economy and the acceleration of the integration process, the maritime transport industry will play a greater role. It is the general trend to take the development road of "Green Shipbuilding". ALG group is committed to energy-saving equipment research and development, from the fuel oil, lubricating oil, electric boiler and heat insulation to provide you with a full range of solutions.

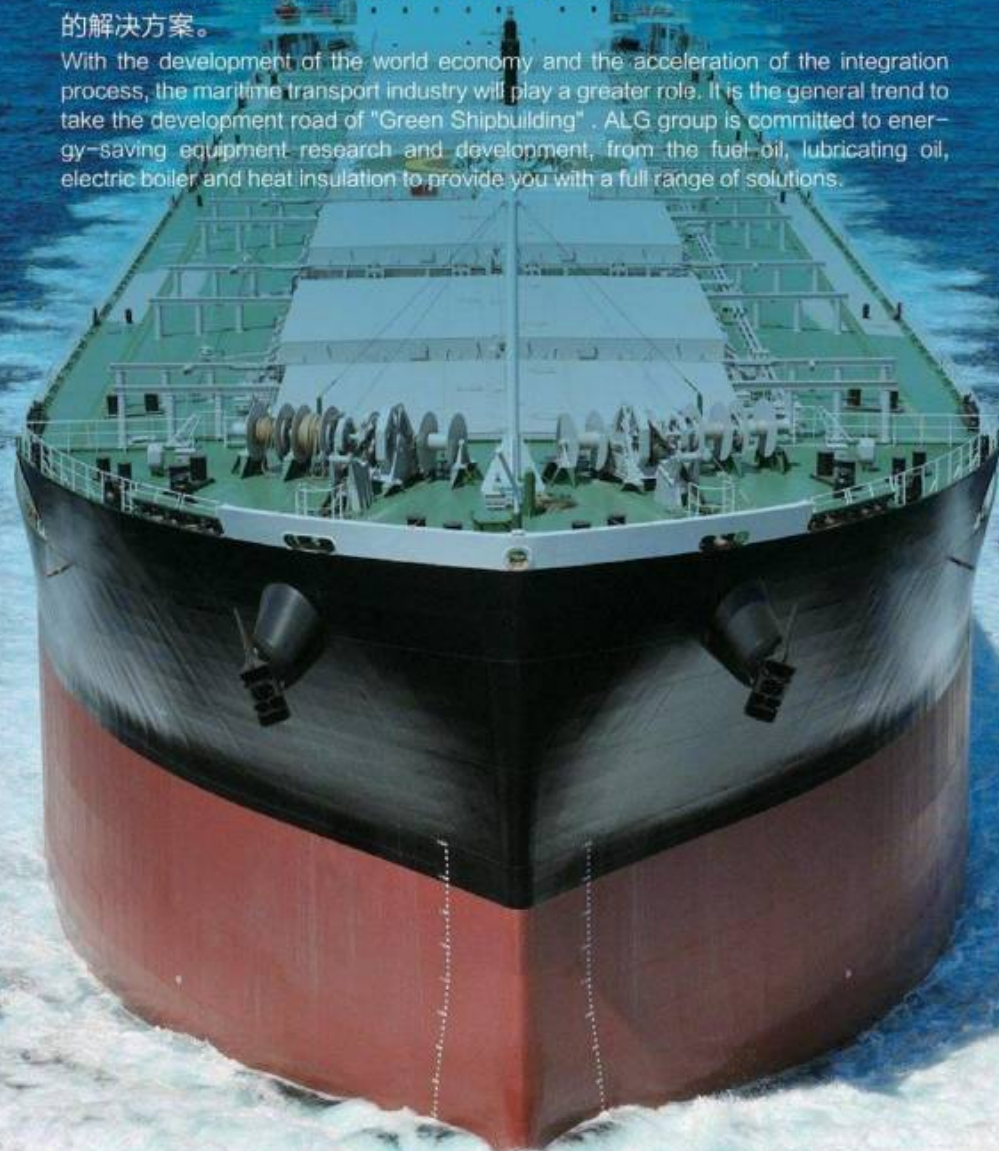

Tank Energy Saving System




舱柜节能系统

系统原理图

System Schematic Diagram

国内首创
Initiative in China
Advanced in Globe 国际领先

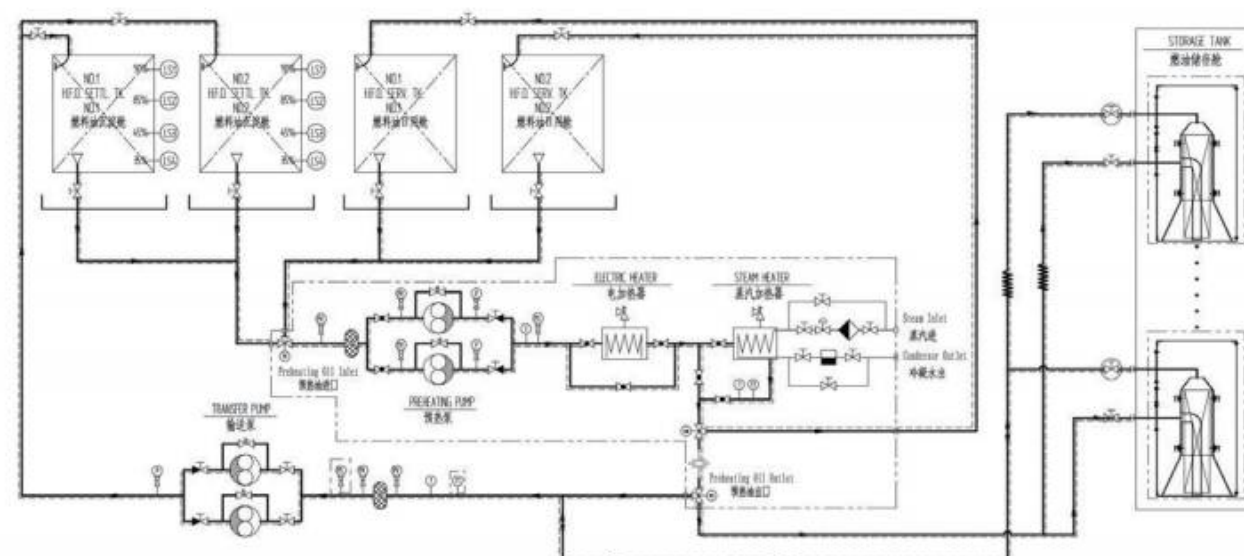

一种利用燃油输送泵进行循环加热的新型驳运燃油方法

专利号：ZL2019113133502

一种基于船舶的燃油混合装置

专利号：ZL2020203938024

设计理念 DESIGN CONCEPT

减少燃油舱在加热过程中与外界的热交换损失，通过减低驳运重油而浪费的热量来达到最大程度的节能减排。

The development of TESS has been made in order to maximize energy saving effect which can be achieved by minimizing the volume of heated FO suitable for transferring operation instead of heating the whole storage tank.

工作原理 PRINCIPLE


系统内的预热器将沉淀柜的热油驳回至燃油储存柜内的混合油柜，在混合油柜内进行热油与冷油的强制混合，混合后的燃油经输送泵重新驳至沉淀柜。

Certain volume of heated FO in the settling tank is pumped into the mixing tank by preheating pump to mix with cold oil in the F.O. storage tank. The mixed oil is pumped back into settling tank by transfer pump. Instead of using heating coil, which could greatly reduce the heating coil installation and maintenance cost and reduce the steam consumption.




TESS可以根据船厂的要求进行散供，或组装成不同的模块灵活供货，方便船厂施工。


蒸汽消耗比较 (400K VLOC) STEAM CONSUMPTION COMPARISON

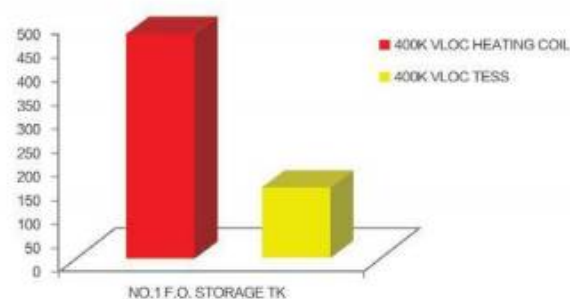

储存舱内独特的混油机构 The unique mixing oil construction in the storage tank

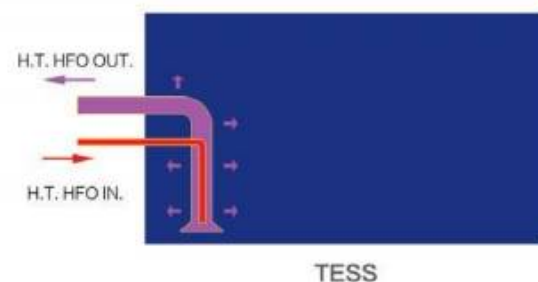

稳定的驳油温度 Stable fuel oil temp. for transferring

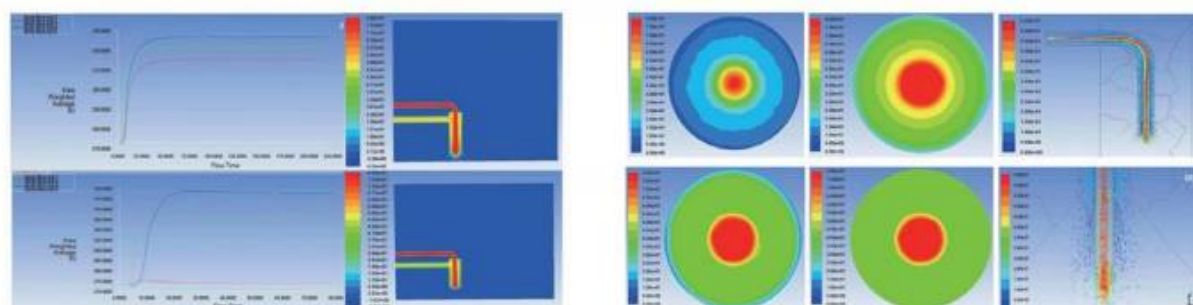


系统特点 FEATURES

1. 混合油柜独特的设计，冷热油混合充分，驳油温度更加稳定；
2. 由于热油在与燃油储存舱内的冷油交换时间短，能最大限度的减少因燃油之间以及燃油通过船体结构向四周散发的热量，从而能大幅度减少蒸汽耗量；
3. 由于加热盘管可以取消或大幅度减少，能有效降低因加热盘管泄漏造成的维修成本；
4. 燃油储存舱内的燃油表面温度较低（常温），不会因温度高造成货损，也可以避免在货舱内出现“出汗”现象造成的货损；
5. 燃油储存舱内的燃油表面温度较低（常温），也能有效避免因温度高热传递造成对压载舱等相邻舱室的腐蚀。

1. The unique mixing oil construction in the storage tank, less heat loss, more energy efficient, better mixing oil effect, more stable oil temperature for transfer.
2. The short time for the exchange between heated oil and cold oil could reduce the heat loss caused by F.O. exchanging and the passage of oil through the hull. For a result, the steam consumption could be reduced prominently.
3. The reduction or cancellation of the heating coil could effectively lower the maintenance cost of heating coil leakage.
4. Lower surface temperature of the storage tank could eliminate cargo damage and any "sweat" in the cargo tank.
5. Lower surface temperature of the storage tank could also eliminate the erosion of ballast tank caused by heat transfer.


Frequency Conversion Energy Saving System 变频节能系统

背景及原理 Background and Principle

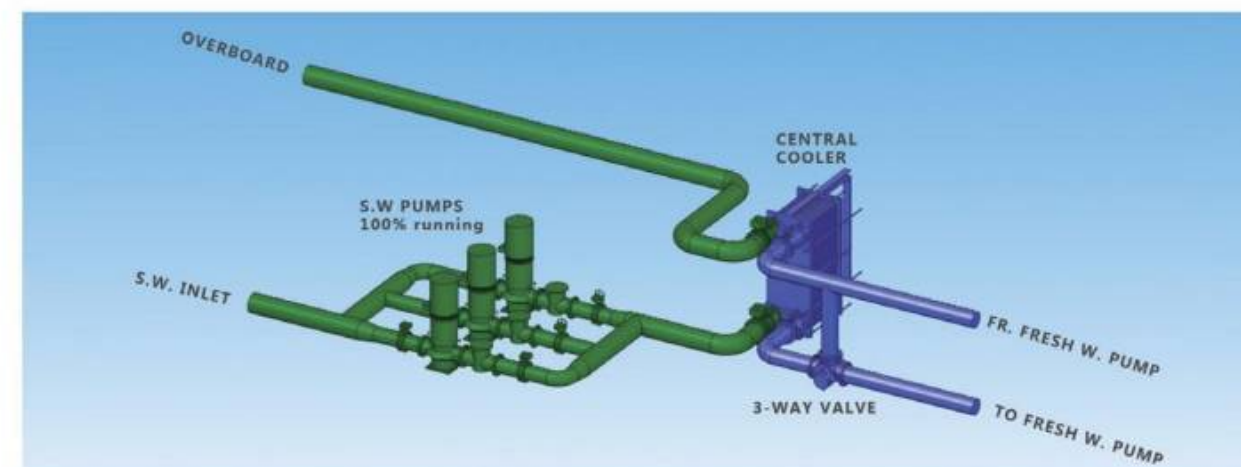

没有变频系统的海水泵始终保持额定转速运行，海水泵功率无法根据工况而改变，浪费能源。

Sea water pump is always keep rated speed running if no frequency conversion system, which the power of the pumps no changed keeping the rated power, so waste energy.


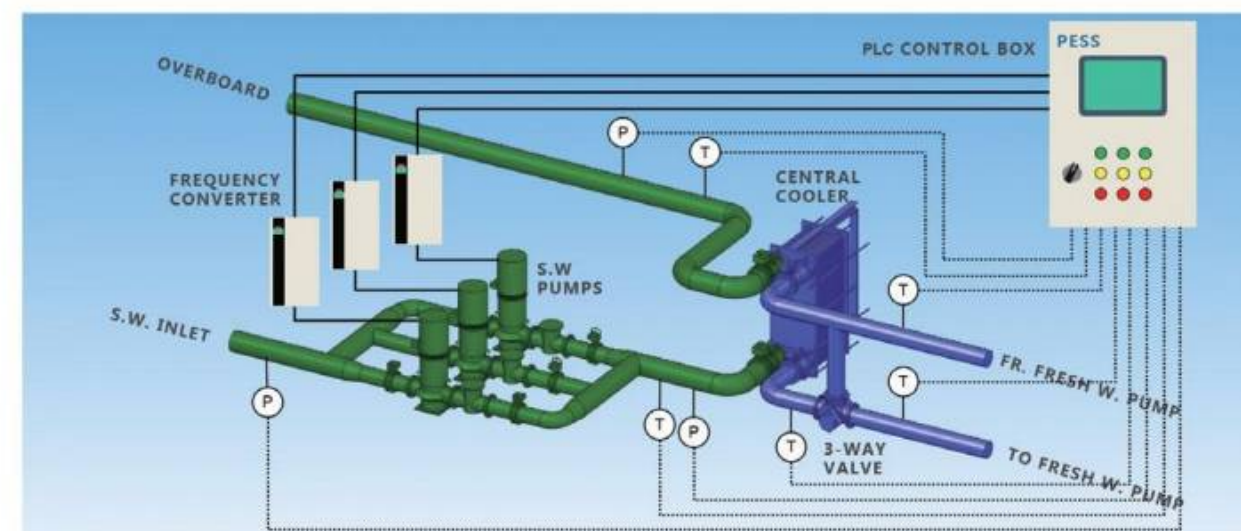


海水变频系统（监测海水的温度、压力，淡水的温度及三通阀的位置）能根据海水温度及柴油机负荷自动控制泵的转速，从而达到节能效果。

Pump energy saving system which monitor the sea water pressure, temperature and fresh water temperature and three-ways valve position, can control sea water pump speed to save energy according to the sea water temperature and the diesel engine load.



■ 加装结构图 STRUCTURAL DRAWING

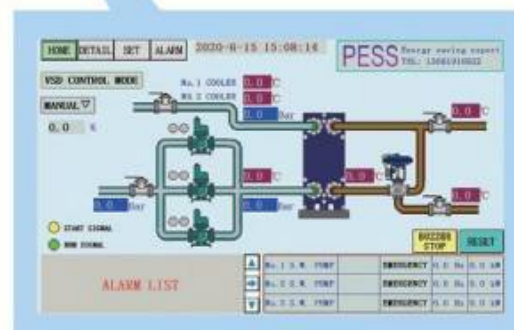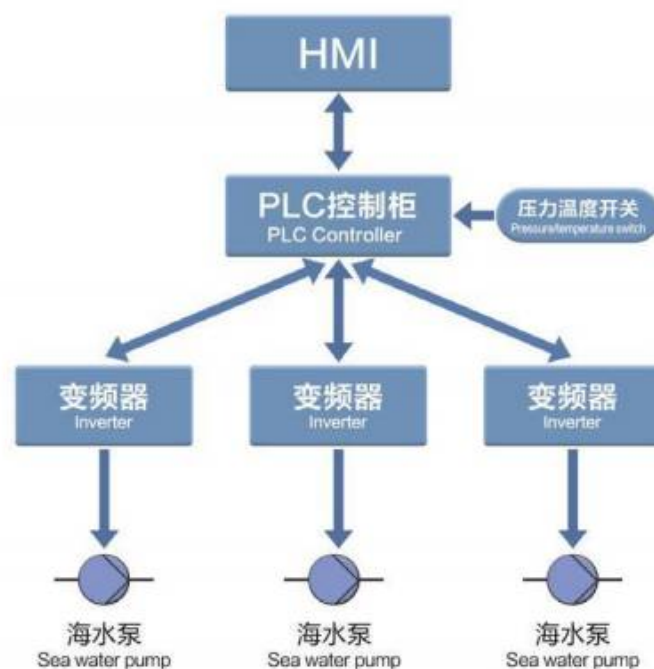

■ 系统特点 FEATURES

1. 节能减排，高回报率
 2. 方案定制，投资预测
 3. 安装灵活，易于改装
 4. 防止盐析，维护预警
 5. 前馈控制，旁通模式，安全可靠
 6. 转速降低，减少磨损，延长寿命
1. Energy saving, high rate of return.
 2. Investment forecast as per owner ship usage habit.
 3. Easy installation, easy retrofit.
 4. Anti-scaling and alarm when pressure loss over cooler high.
 5. Pre-control when ME load increase suddenly. Bypass mode available when frequency converter failure.
 6. Revolution decrease, reduce wear, extend life.

F.O. Homogenizer 燃油均质机



一种调节式均质机磁性联轴器
专利号：ZL2020202055917

■ 工作原理 PRINCIPLE

通过两组高速旋转的叶轮产生的机械剪切力和强大的涡空能量，对燃油中软性淤泥进行细化、均质，从而提高分油机对硬质颗粒的分离效果、减少分油机的排渣量，以及改善燃油雾化、提高燃油燃烧效率、保护环境。

The homogenizer can smash and homogenize sludge in the fuel oil by shear force and cavitation energy formed through high speed impeller. So the particles in the fuel oil can be separated easily by purifier. Reduce the sludge separated by purifier to saving energy, and also improve the atomization which would realize sufficient combustion and protect environment.

■ 均质机特点 FEATURES


1. 有效剥离硬质颗粒表面的淤泥，提高分油机对硬质颗粒的分离效果；
2. 能有效细化、均质软性淤泥，减少分油机的排渣量、节约能源；
3. 降低燃油粘度，改善雾化效果，提高燃油的燃烧效率；
4. 独特的叶轮式结构，进出口无压力降，机体内无堵塞的可能；
5. 采用磁性联轴器，无更换机械密封的烦恼；
6. 结构简单，操作、维护方便；
7. 单元式设计，安装施工方便。

1. Effectively peeling off and smashing sludge wrapped outside the particles, thus those particles can be separated easily by purifier.
2. Homogenizing and dissolving large soft sludge blocks so as to reduce the sludge separated by purifier and save energy.
3. Reducing the tension and viscosity so as to improve the effect of atomization and fuel oil combustion efficiency.
4. The unique impeller structure eliminates the possibility of clogging in machine and no pressure drop at the suction and discharge.
5. The magnetic coupling, without trouble of mechanical seals replacement.
6. Simple structure, easy for operation and maintenance.
7. Unit type designed, easy for installation.

■ 没有使用均质机的情況 BEFORE USING HOMOGENIZER




分油机前 Before purifier

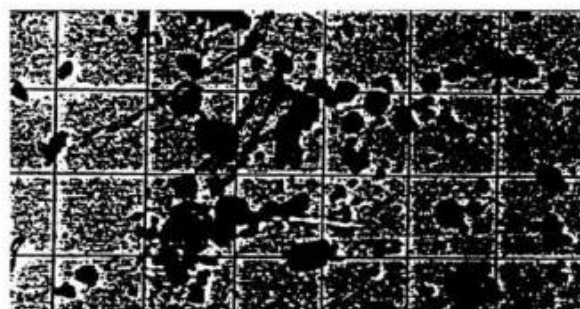

分油机后 After purifier

■ 使用均质机的情況 AFTER USING HOMOGENIZER

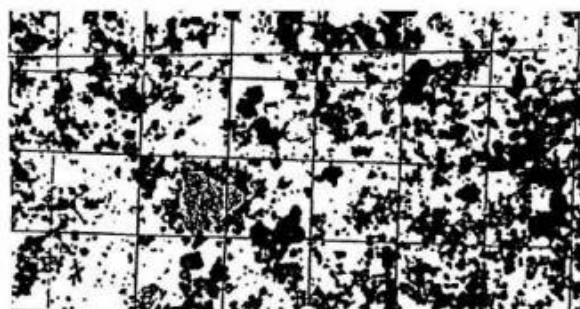

分油机前 Before purifier



分油机后 After purifier

■ 选型表 SELECTION TABLE


型号 Type	最佳处理量 Max. Capacity (m³/h)	电机功率 Motor	长×宽×高 L×W×H
JZ-2000	2.0以下	1.5kW	1045 × 380 × 420mm
JZ-5000	5.0以下	4.0kW	1270 × 380 × 540mm
JZ-10000	10.0以下	7.5kW	1510 × 500 × 570mm
JZ-20000	20.0以下	15kW	1830 × 500 × 680mm

Cleaning Equipments For Lube(Hydraulic)Oil



滑油（液压油）净化处理装置

■ 滑油净化单元 L.O. PURIFIER UNIT

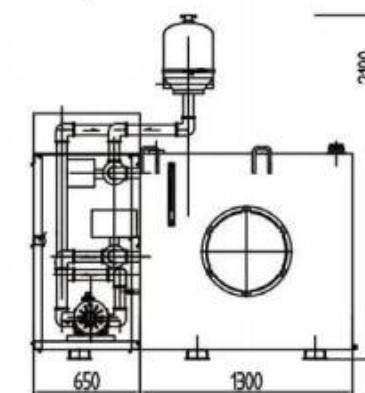

一种可移动式油污净化系统
专利号:ZL2020200411688

■ 工作原理 PRINCIPLE

模块化设计，操作方便，大处理量适用于滑油用量较大的场合，如船厂串油使用的滑油。小处理量、采用手推车式设计可方便移动，适用于船舶甲板机械液压油的净化。

The big capacity unit is designed to module, very easy to operate, and suitable for the large amount of lube oil such as flushing oil for L.O. pipe in the shipyard. The small capacity unit is designed to hand-push-type, can be removed easily and suitable for the small amount of lube oil such as deck machinery in the vessel.

■ 特点 FEATURES

- 1、能滤除油品中的污染杂质及游离水与乳化水，有效的延长油品使用寿命降低生产成本。
- 2、能将油品滤净至ISO 14/9 或相当于NAS 5级的标准，水份含量 < 100ppm。
- 3、整机设有联锁安全保护，进油与出油系统联动及出油压力过高或油位过高均能自动控制，发出异常警示。

1. It could remove the particles, free water and emulsified water in the oil, which could extend the oil life span while reducing the cost.
2. The filtered oil could meet ISO 14/9 standard or the equivalent of NAS 5 standard, the moisture content in oil is below 100ppm.
3. The whole machine has interlock security protection. The in-coming and out-coming of oil, as well as high pressure of oil out-coming or high oil level could be controlled automatically to prevent any abnormal situations.

■ 选型表 SELECTION TABLE

型号 TYPE	模块油柜容积 TANK CAP. (about)(m³)	离心机处理量 CLARIFIER CAP.(m³/h)	滤器处理量 FILTER CAP. (m³/h)
GHLU-0.6	0.06	0.6	0.25
GHLU-1.0	0.5	1.0	0.5
GHLU-4.0	1.0	4.0	1.0

■ 净油机 CLARIFIER



■ 工作原理 PRINCIPLE

压力油通过中空的中轴进入离心机内转子腔室，在腔室内蓄压后，通过对称的喷嘴喷射到底部，喷嘴喷射的反作用力推动内转子高速转动，油中的杂质被离心力分离到内转子四周。离心后的净油从底部靠重力流入油箱。

The pressured oil is pumped into inner space in the bowl through hollow shaft and then spray to bottom of the bowl through symmetrical nozzle after gaining pressure. The bowl will rotate under reactive force caused by nozzle ejection. The particles will be separated with oil by centrifugal force. Then the cleaning oil flow into oil tank by gravity.

■ 特点 FEATURES

- 1、结构简单、体积小，便于安装与维护；
 - 2、转速高、离心效果好，能分离 $1\mu\text{m}$ 的杂质；
 - 3、耗材少，维护成本低。
1. Simple structure, small size, thus it is easy to be installed and maintained.
 2. High rotation speed, good centrifugal effect: it could separate particles whose sizes are $1\mu\text{m}$.
 3. Less consume materials are required and the cost of maintenance is low.

■ 选型表 SELECTION TABLE

型号 Type	最大处理量 Max. Capacity (m ³ /h)	转速 rpm	外形尺寸 (直径×高) Dimension (D*H) (mm)	重量 Weight (Kg)	适用于油箱容积 Suitable For oil tank cap. (m ³)
GHI-0.6	0.6	6600	Φ173 × 196	3.0	0.5以下
GHI-1.2	1.2	4500	Φ230 × 345	9.5	0.5 ~ 3.0
GHI-4.5	4.5	3800	Φ340 × 500	30.0	3.0 ~ 10.0

Kitchen Electrical Equipment



厨房电器设备

公司专业设计生产船用厨房电器设备，产品种类齐全、质量稳定，长期以来，以不断创新的设计理念、精良的制造工艺和严格的品质管理以及专业化的售前售后服务，获得了众多客户的赞誉。


The company specializes in the design and production of Marine kitchen electrical equipment, a complete range of products, stable quality, for a long time, with continuous innovation in the design concept, sophisticated manufacturing technology and strict quality management and professional pre-sales and after-sales service, has won the praise of many customers.




Electromagnetic Range





RCZ-10B

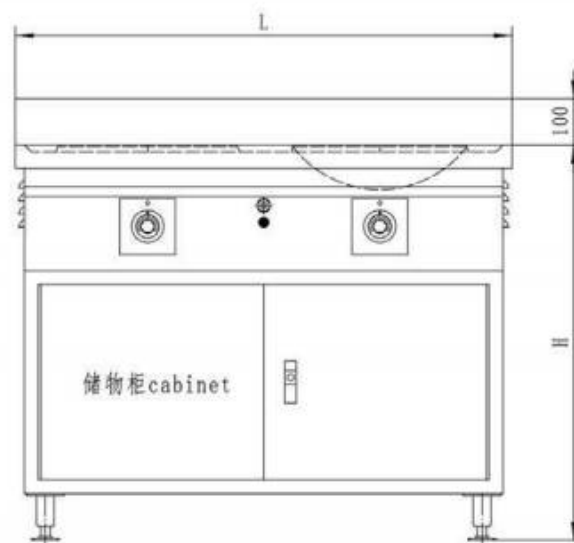

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 采用电磁感应加热原理，具有加热速度快、热效率高的特点，无明火、无烟、无废弃、安全性能好、清洁卫生
Electromagnetic Stove adopts the principles of electromagnetic induction heating with the characteristics of high efficiency and heating fast, no naked flame, smokeless, no emissions, sanitation and hygiene, safe and reliable

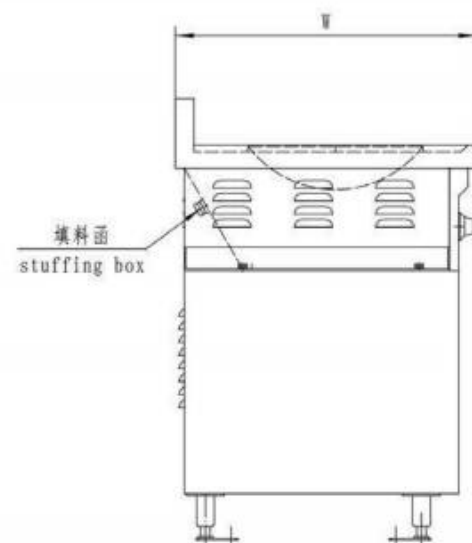



RCZ-15大锅电磁灶

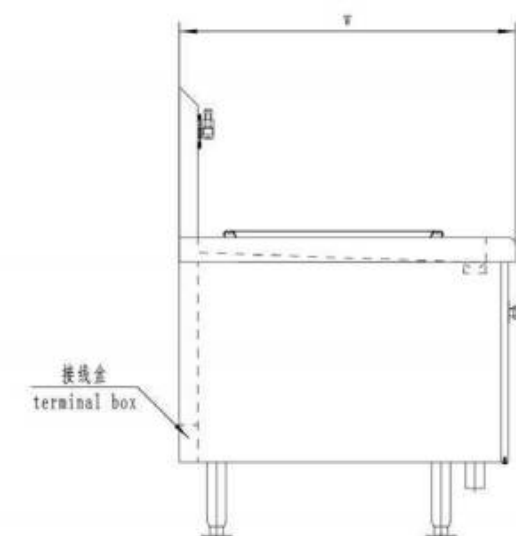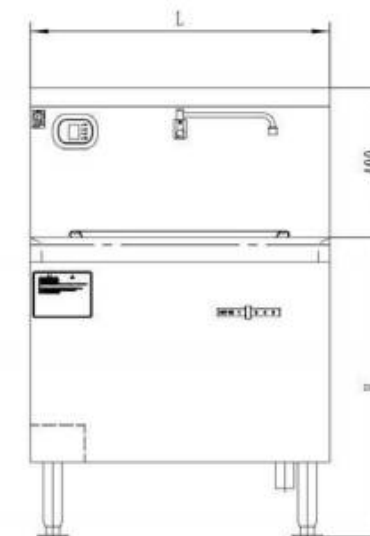

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	外形尺寸 (L×W×H) External Dimension	重量 Weight	灶面形式 Stove surface form
RCZ-5B	3~380V/440V	5kW	600×650×850mm	55kg	1球面或平面 1 spherical surface or plane
RCZ-10B		10kW	1070×650×850mm	150kg	1球面和1平面 1 spherical surface and 1 plane surface
RCZ-15		15kW	800×900×800+400mm	120kg	-
RCZ-30		30kW	1500×900×800+400mm	180kg	-

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

RZ系列电灶



RZ-4G

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 电灶由上、下灶体组合而成，便于各种舱门的进入
Electric Stove consists of upper and lower stove bodies which can be moved into cabin door easily
- ◆ 每块加热板增设有温度控制器，即满足了不同的烹饪要求，也延长了电加热板的使用寿命
Temperature controller is fitted in every piece of heating panel,not only to meet the different cooking requirements but also to extend the useful life of electric heating panel
- ◆ 具有煮、烧、炒和烘烧等多种功能，清洁卫生、使用方便、安全可靠
The electric stove is a kind of electric heat cooking apparatus with multifunction,such as cooking, stir-frying, toasting etc, at the same time, sanitation and hygiene, easy to use, safe and reliable
- ◆ 设有防浪扶手和防浪架，灶下可加装烤箱或储物柜
Equipped with anti-wave handrail and anti-wave frame, oven or cabinet can be installed under the stove

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	配置 Scheme	外形尺寸 (L×W×H) External Dimension	重量 Weight	
RZ-4B	3~220V	4kW	1煮 1 circular hot plate	500×500×850mm	45kg	
RZ-4G		4kW	1炒 1 circular hot plate	500×500×280mm	38kg	
RZ-8A		8kW	1煮1炒 1 circular hot plate;1 camber hot plate	800×480×800mm	80kg	
RZ-9A		9kW	1煮1炒 1 circular hot plate;1 camber hot plate	1070×650×850mm	150kg	
RZ-9B		9kW	1煮1炒 1 circular hot plate;1 camber hot plate	1070×650×850mm	150kg	
RZ-10C		10kW	2煮1烤箱 1 circular hot plate;1 camber hot plate;1 oven	900×650×850mm	160kg	
RZ-12B		3~380V	12kW	3煮 3 circular hot plates	1200×650×850mm	160kg
RZ-12C		3~415V	12kW	1煮1炒1烤箱 1 circular hot plate;1 camber hot plate;1 oven	1000×650×850mm	160kg
RZ-15C		3~440V	15kW	4煮1烤箱 4 circular hot plates;1 oven	700×700×850mm	140kg
RZ-15C			15kW	2煮1炒1烤箱 2 circular hot plates;1 camber hot plate;1 oven	1500×650×850mm	200kg
RZ-18C			18kW	3煮1炒1烤箱 3 circular hot plates;1 camber hot plate;1 oven	900×850×800mm	200kg
RZ-18C			18kW	2煮2炒1烤箱 2 circular hot plates;2 camber hot plate;1 oven	950×850×800mm	200kg
RZ-18C(F)	18kW		4煮1烤箱 4 circular hot plates;1 oven	880×880×800mm	200kg	
RZ-28C		28kW	6煮1烤箱 6 auadrate hot plates;1 oven	1200×900×850mm	350kg	



*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

Electric Bake Oven




RGK-8A

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 由预热箱和电烤炉两部分组成，用来烤制面包、点心等
Electric Dry Oven consists of two parts of pre-heated box and electric dry oven which is specially used for roasting bread, pastry and some meat and fish dishes, etc
- ◆ 整体造型美观大方，操作方便、安全可靠
Graceful-looking, pleasing in appearance, easy to use, safe and reliable
- ◆ 采用德国进口温控。加热温度在50-300℃之间可任意设定，并自动恒温
It adopts temperature control imported from Germany. The heating temperature can be set at any time between 50-300℃, and the temperature is constant automatically

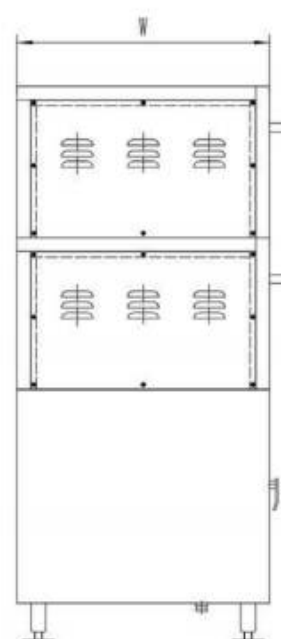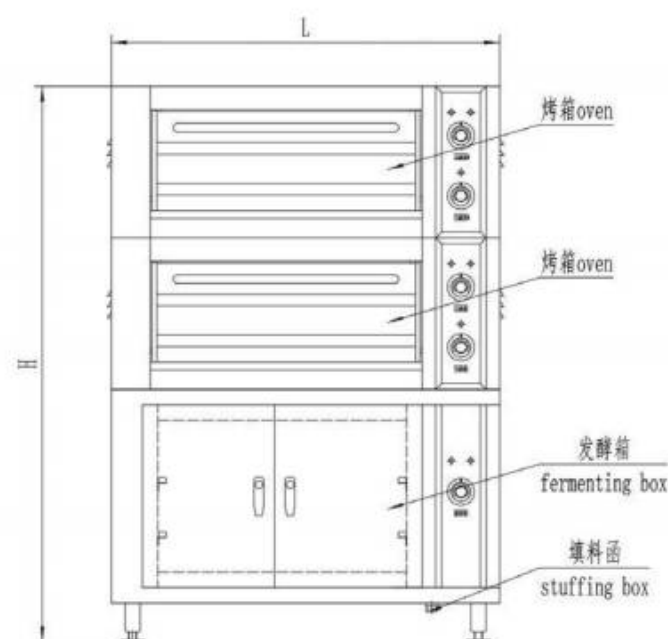

RGK-8A1

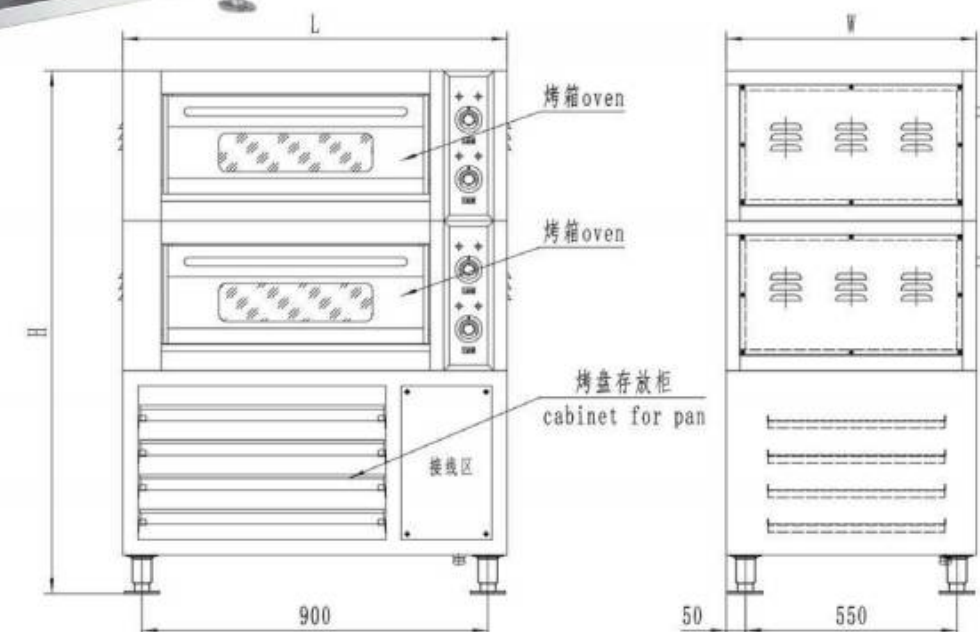

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	产量 Output	外形尺寸 (L×W×H) External Dimension	配置 Scheme	重量 Weight
RGK-4A		3.6kW	12kg/h	800 × 650 × 850mm	1烤箱 1 Oven	80kg
RGK-5A	3~220V	4.5kW	15kg/h	1000 × 650 × 1040mm	1烤箱1发酵箱 1 Oven 1 Prover	120kg
RGK-8A	3~380V 3~415V	8.1kW	30kg/h	1000 × 650 × 1430mm	2烤箱1发酵箱 2 Oven 1 Prover	180kg
RGK-8A1	3~440V	7.2kW	30kg/h	1000 × 650 × 1430mm	2烤箱 2 Oven	180kg
RGK-11A		10.8kW	45kg/h	1000 × 650 × 1510mm	3烤箱 3 Oven	180kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

Rice Cooking Box



蒸饭箱




RX-80B


- ◆ 采用箱式结构，分为电加热、蒸汽加热或电蒸汽加热两用，通过电或蒸汽加热使箱内的水产生蒸汽，达到蒸制食品或消毒物品的目的
The box type structure is divided into electric heating, steam heating or electric steam heating. The water in the box is heated by electricity or steam to produce steam for the purpose of steaming food or disinfecting articles
- ◆ 设有自动进水和失水保护装置并增加了定时装置，密封性能好、升温快、无明火、清洁卫生、无污染
A protecting unit with a timer for automatic inletting and dehydrating water is fitted, which has the characteristics of good sealing, rapid warm-up, no naked fire, sanitation and hygiene, as well as pollution-free etc



控制箱
Control Box

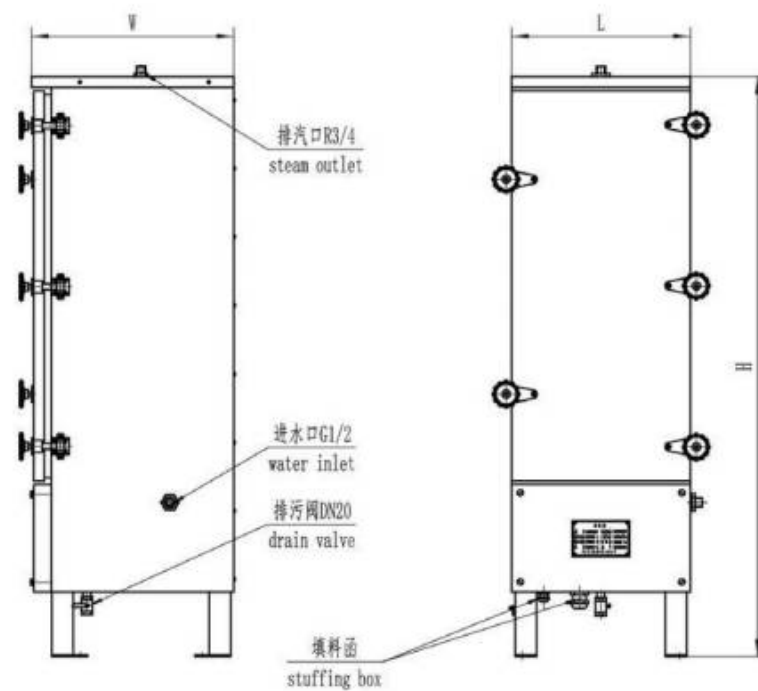

RX-100B

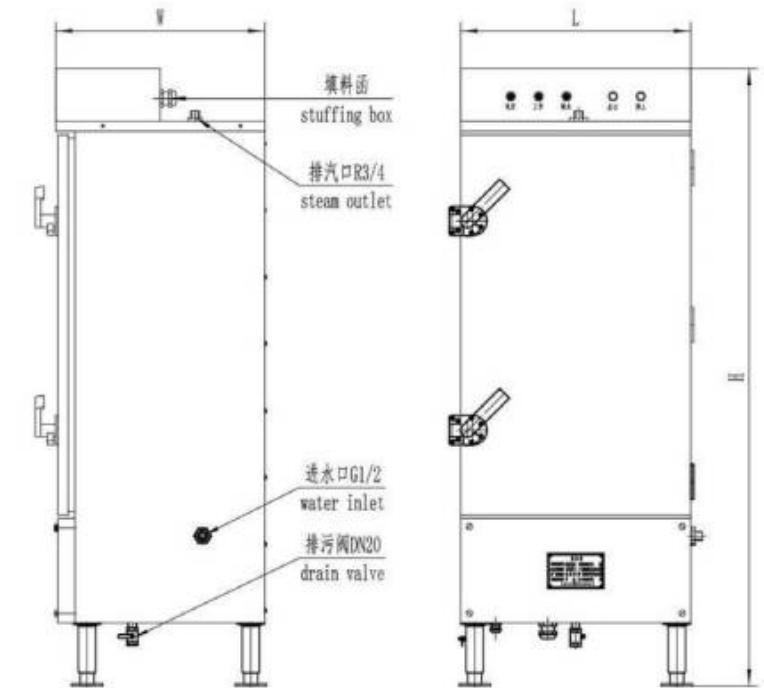

型号 Model	加热方式 Heats up the way	蒸汽压力 Steam Pressure	额定电压 Rated Voltage	额定功率 Rated Power	外形尺寸 (L×W×H) External Dimension	重量 Weight
RX-60A	电 Electricity	~	3~220V 3~380V 3~415V 3~440V	13.5kW	1200 × 650 × 850mm	135kg
RX-30B				6kW	620 × 700 × 850mm	75kg
RX-50B				9kW	500 × 565 × 1250mm	150kg
RX-80B				9kW	500 × 565 × 1520mm	200kg
RX-100B				13.5kW	660 × 600 × 1620mm	250kg
LX-30B	电和蒸汽 Electricity and Steam	≤0.30MPa	3~220V 3~380V 3~415V 3~440V	6kW	620 × 700 × 850mm	75kg
LX-50B				9kW	500 × 565 × 1250mm	150kg
LX-80B				9kW	500 × 565 × 1520mm	200kg
LX-100B				13.5kW	660 × 600 × 1620mm	250kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

Tilting Electric Frying Pan





可倾式电炒锅





RGC-9B

- ◆ 不锈钢结构
Stainless steel structure
- ◆ 具有炒、烧、煮等多种功能，煎炸尤佳
Tilting Electric Cooking Pan can be reversed with multifunction, such as stir-frying and boiling as well as cooking etc, is good at frying especially
- ◆ 锅体采用铸铁或不锈钢材料，可翻转，温度可在50℃~300℃之间调节，具有功率大、容量大、加热均匀、操作简便等特点，适应大热量烹饪
The pan body is made of cast iron or stainless steel and can be turned over. The temperature can be adjusted between 50°C and 300°C. Temperature of big power, large capacity, heating uniformity, and easy operation etc., suitable for big consumer
- ◆ 手动倾斜装置，操作方便省力，带防风浪气撑锅盖
Manual tilting device, easy to operate and labor-saving, with wind-proof pot cover

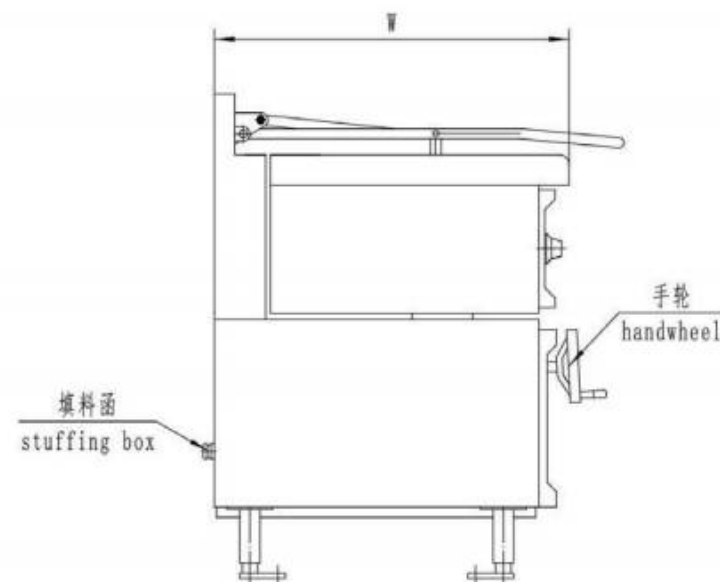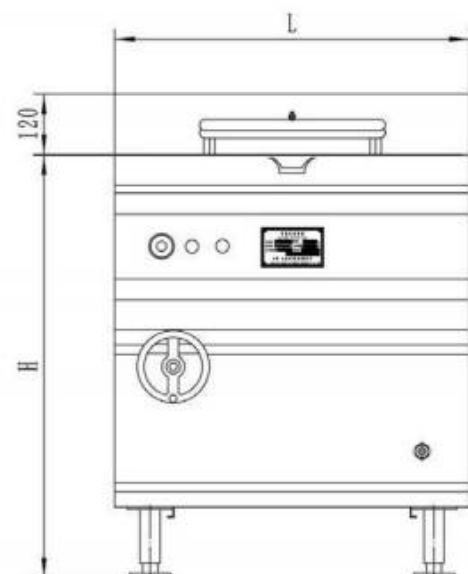

RGC-9A

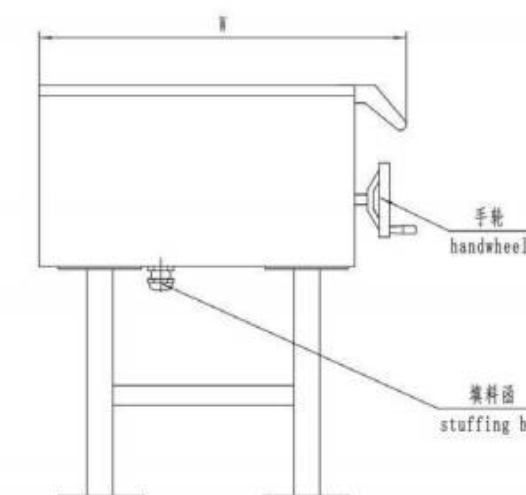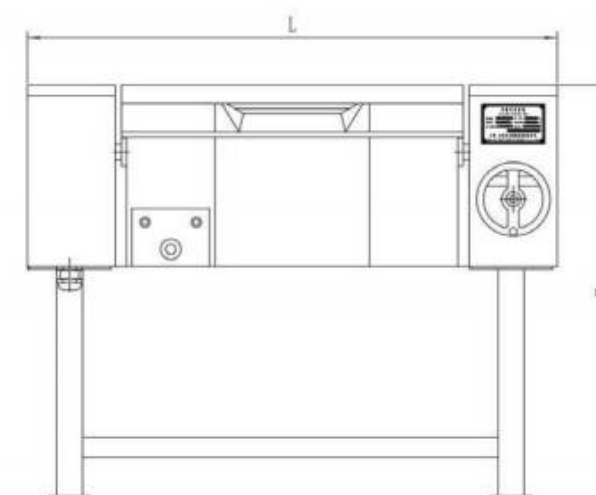

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	容积 Cubage	外形尺寸 (L×W×H) External Dimension	重量 Weight
RGC-9A	3~220V	9kW	48L	1025 × 740 × 800mm	120kg
RGC-9B	3~380V 3~415V	9kW	48L	700 × 700 × 850mm	150kg
RGC-18A	3~440V	18kW	150L	1355 × 810 × 850mm	180kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request


Tilting Electric Warming Soup Pot

可倾式电热汤锅



RGT-60B

- ◆ 具有煮饭、烧汤、下面条、水饺等烹调功能，锅体全不锈钢材料、可翻转，操作方便、安全可靠、清洁卫生
It has multifunction such as cooking rice, soup, noodles, dumplings etc, Material of main body is stainless steel, can overturn, easy to use, safe and reliable, clean health
- ◆ 手动倾斜装置，操作方便省力，带防风浪气撑锅盖
Manual tilting device, easy to operate and labor-saving, with wind-proof pot cover
- ◆ 锅体采用隔层结构，间接加热，加热高效均匀
The pot body adopts the structure of interlayer, indirect heating, efficient and even heating
- ◆ 外隔层间填充复合隔热材料，确保热量不外导
The outer layer is filled with composite insulation material to ensure that the heat is not externally conductive
- ◆ 带有低水位自动断电保护功能
With low water level automatic power off protection function
- ◆ 设置压力表及安全阀，对设备进行过压保护
Pressure gauge and safety valve are set to protect the equipment from over-pressure

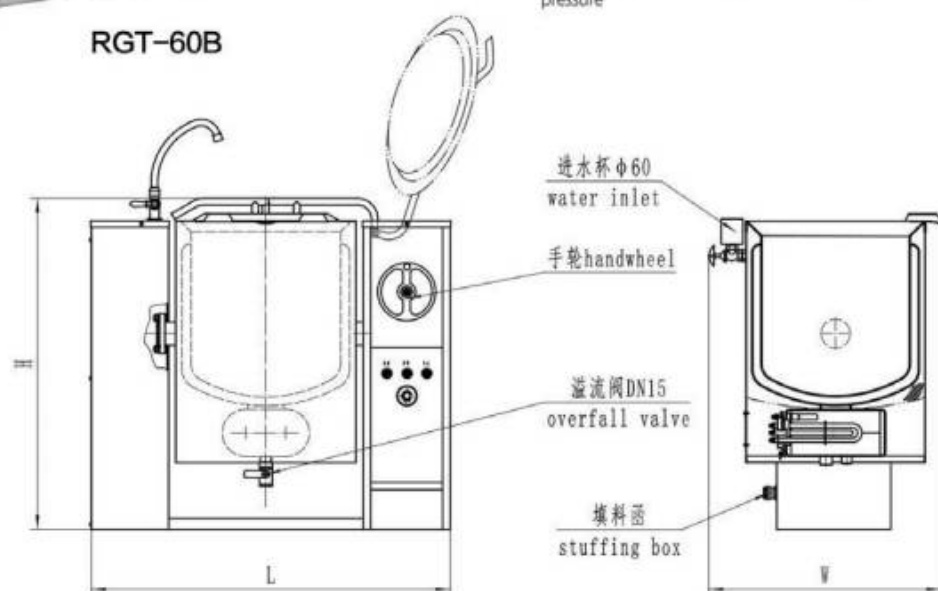

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	容积 Cubage	外形尺寸 (L×W×H) External Dimension	重量 Weight
RGT-60B	3~220V 3~380V 3~415V	9kW	60L	925 × 570 × 960mm	120kg
RGT-120B	3~440V	13.5kW	120L	1125 × 790 × 920mm	150kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request


Electric/Steam Rice Cooker

电蒸汽两用饭锅



RGZ-80A

- ◆ 不锈钢结构
Stainless steel structure
- ◆ 采用电、蒸汽两用加热方式，能煮饭、面、水饺、烧水、做汤等
It is a device with dual-purpose electricity and steam heating which can cook rice, noodles, dumplings and so on
- ◆ 产品设有泄压装置，使用方便，安全可靠
Rice Cooker with pressure relief unit is easy to use, safe and reliable
- ◆ 加热桶为双层，加热高效均匀
The heating barrel is double layer, heating is efficient and uniform

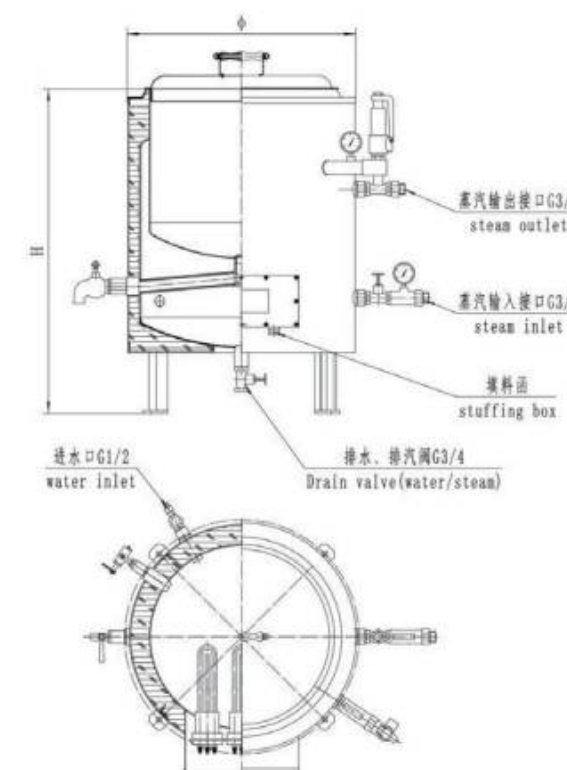

控制箱
Control Box

型号 Model	加热方式 Heats up the way	蒸汽压力 Steam Pressure	容积 Cubage	额定电压 Rated Voltage	额定功率 Rated Power	外形尺寸 (D×H) External Dimension	重量 Weight
RGZ-40A	电和蒸汽 Electricity and Steam	≤0.30Mpa	40L	3~220V	9kW	Φ525 × 800mm	85kg
RGZ-80A			80L	3~380V 3~415V 3~440V	13.5kW	Φ634 × 900mm	115kg
RGZ-120A			120L		—	Φ485 × 840mm	95kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request



Electric Bain-Marie

电热保温台




RBT-4B

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 加热腔体内的水，通过热传递对放置于腔体内的容器进行加热，从而对容器内的菜肴进行保温
Insulation Table is a device which can maintain the temperature of meals inside the table by heating the water in the table cavity and transferring the heat to the meals containers of the table
- ◆ 保温台设有自动进水及失水保护装置，确保了电加热元件的使用寿命
Insulation table is equipped with automatic water inlet and water loss protection device, which ensures the service life of electric heating elements
- ◆ 台面按照标准GN份数盘尺寸设计
The table is designed according to the size of GN plates
- ◆ 柜内可选配普通储物柜或热柜
The cabinet can be equipped with ordinary storage cabinet or hot cabinet

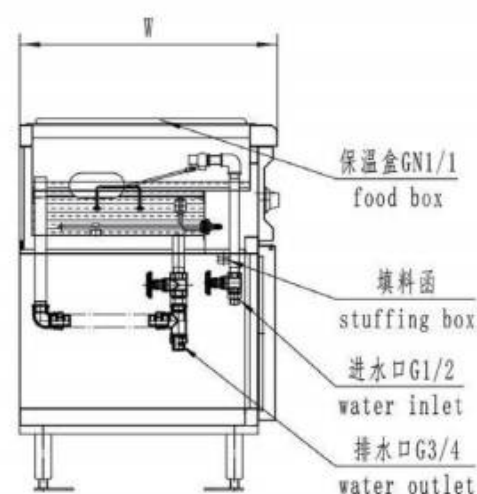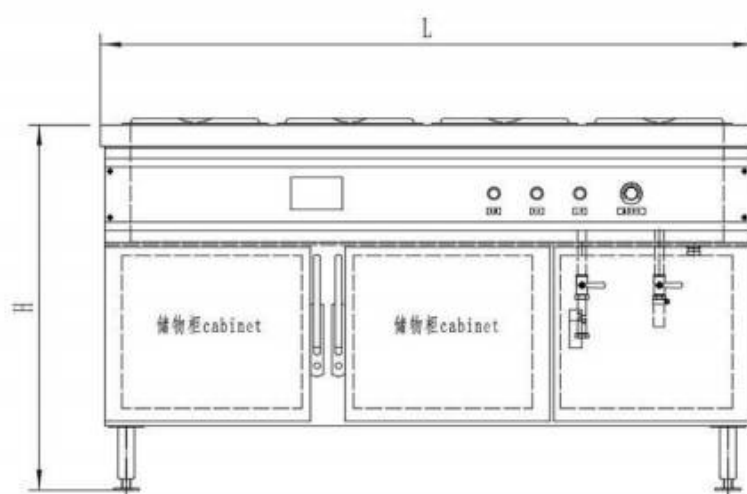

RBT-4A

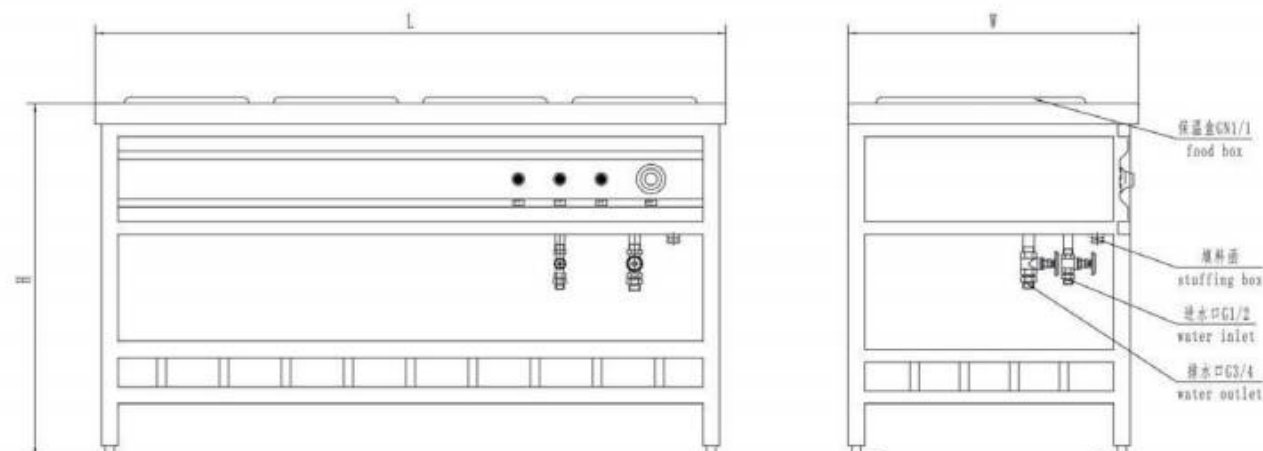

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	菜盒容积 Box with Vegetable	保温箱容积 Oven Cubage	外形尺寸 (L×W×H) External Dimension	重量 Weight
RBT-3A	~220V 3~220V 3~380V 3~415V 3~440V	3kW	3 × 15L	—	1160 × 600 × 850mm	85kg
RBT-4A		4kW	4 × 15L	—	1520 × 600 × 850mm	100kg
RBT-5A		5kW	5 × 15L	—	1880 × 600 × 850mm	115kg
RBT-6A		6kW	6 × 15L	—	2240 × 600 × 850mm	130kg
RBT-3B		3kW	3 × 15L	—	1160 × 600 × 850mm	100kg
RBT-4B		4kW	4 × 15L	—	1520 × 600 × 850mm	150kg
RBT-5B		5kW	5 × 15L	—	1880 × 600 × 850mm	200kg
RBT-6B		6kW	6 × 15L	—	2240 × 600 × 850mm	230kg
RBT-3C		4kW	3 × 15L	1 × 100L	1160 × 600 × 850mm	100kg
RBT-4C		5kW	4 × 15L	1 × 100L	1520 × 600 × 850mm	150kg
RBT-5C		7kW	5 × 15L	2 × 100L	1880 × 600 × 850mm	200kg
RBT-6C		8kW	6 × 15L	2 × 120L	2240 × 600 × 850mm	230kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

Electric Fryer With Fire Extinguishing System




带灭火系统电炸炉



RZL-20BM

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 装有手动/自动灭火装置, 符合SOLAS公约规范要求
Equipped with manual/automatic fire extinguishing device, in accordance with SOLAS Convention specifications
- ◆ 超温报警, 自动断电灭火, 杜绝安全隐患
Overtemperature alarm, automatic power off fire suppression, eliminate safety hazards
- ◆ 用于烹、炸各类食品, 油温可调
Used for cooking and frying all kinds of food, the oil temperature can be adjusted
- ◆ 上翻式加热管设计易于炸缸清洁
The flip-up type heating elements make the tanks easy to clean
- ◆ 配带不锈钢可调底脚, 方便船上安装
Equipped with stainless steel adjustable feet, it is convenience to install on vessel

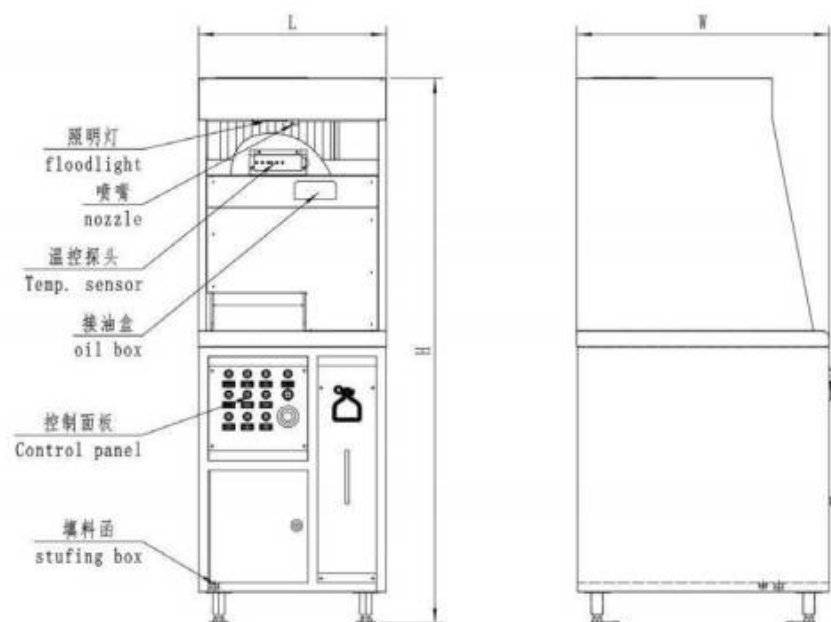


Electric Fryer




电炸炉



RZL-8B

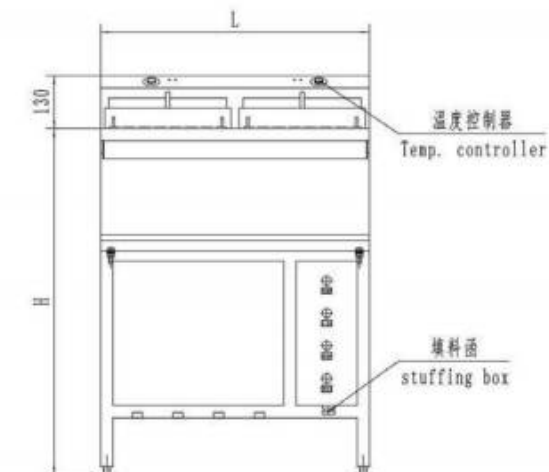

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 采用底部加热, 无明火, 安全可靠, 清洁卫生, 油温可调
It adopts fryer bottom heating and the temperature of cooking oil can be adjusted, with the characteristics of no fire hidden peril, sanitation and hygiene, safe and reliable
- ◆ 用于烹炸各类食品
Electric Fryer is used for frying all kinds of food

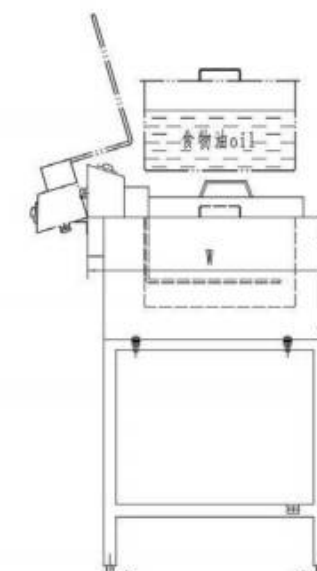

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	锅腔容积 Cubage	油缸数量 Qty.	外形尺寸 (L×W×H) External Dimension	重量 Weight	附加功能 Accessorial Function
RZL-4B	~220V 3~220V	4kW	18L	1	500×600×850mm	55kg	-
RZL-8B	3~380V 3~440V	8kW	12.5Lx2	2	660×600×850mm	65kg	-
RZL-20BM	3~220V 3~380V 3~415V 3~440V	7.2kW 8.6kW 9.6kW	20L	1	595×800×1725mm	230kg	灭火装置 Fire extinguishing device

* 以上设备可根据用户要求定制

The product above may be manufactured according to consumer's request



Electric Grill and Griddle

电烤煎锅



RZB-9B

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 具有烤、煎等多种功能
With baking, frying and other functions.
- ◆ 锅体采用铸铁材料，温度可在50℃~300℃之间调节，具有功率大、容量大、加热均匀、操作简便等特点，适应大热量烹饪
The pan body is made from cast iron, The temperature can be adjusted between 50°C and 300°C, Temperature of big power, large capacity, heating uniformity, and easy operation etc, suitable for big consumer

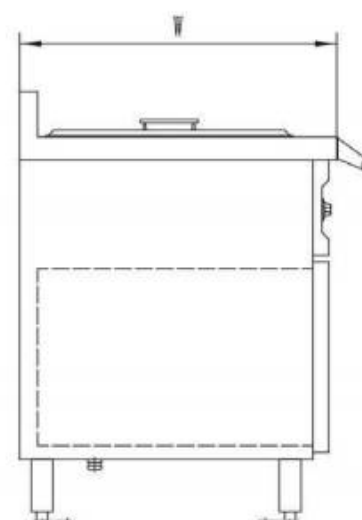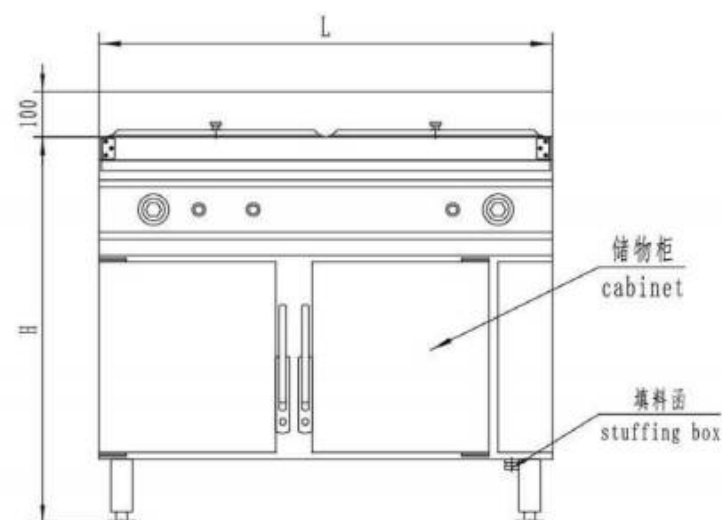

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	锅腔尺寸 Size of pan	烤煎锅数量 Qty. (bake and fry)	外形尺寸 (L×W×H) External Dimension	重量 Weight
RZB-4B	~220V 3~220V	4kW	435×500mm	1	500×700×850mm	60kg
RZB-9B	3~380V 3~415V 3~440V	9kW	435×500mm	2	1000×700×850mm	115kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request



Electric Baking Pan

电饼铛



RBD-55

- ◆ 热效率高，省时
High efficiency, save time
- ◆ 安全可靠，使用寿命长
Safe, reliable and longer life
- ◆ 智能温控
Intelligent temperature control
- ◆ 磨砂不锈钢上盖更易清洁
Brushed stainless steel cover is easier to clean
- ◆ 发热盘均采用一次压铸成型，密度高，强度大，不变形，受热均匀
The heating pan which was modeled by a die casting has high density, high strength, no deformation and uniform heating

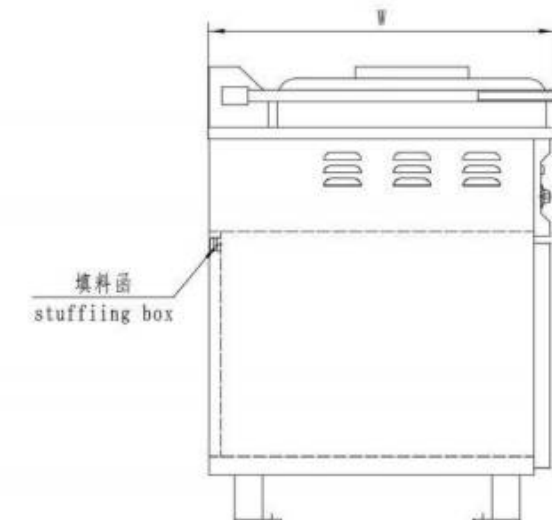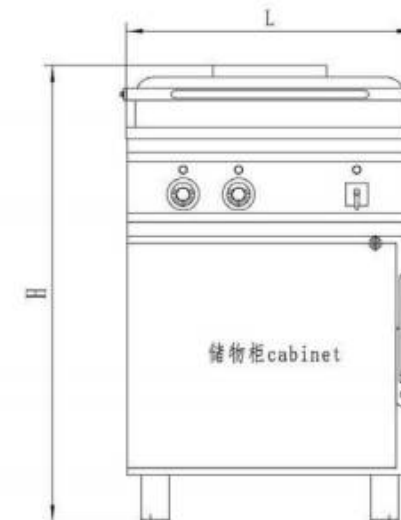

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	温度范围 Temperature Range	产量 Yield	外形尺寸 (L×W×H) External Dimension	重量 Weight
RBD-55	~220V 3~220V 3~380V 3~415V 3~440V	5.5kW	50~300℃	30kg / h	620×750×980mm	95kg


*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

Electric Boiled Water Utensil

电热开水器



RF-30C

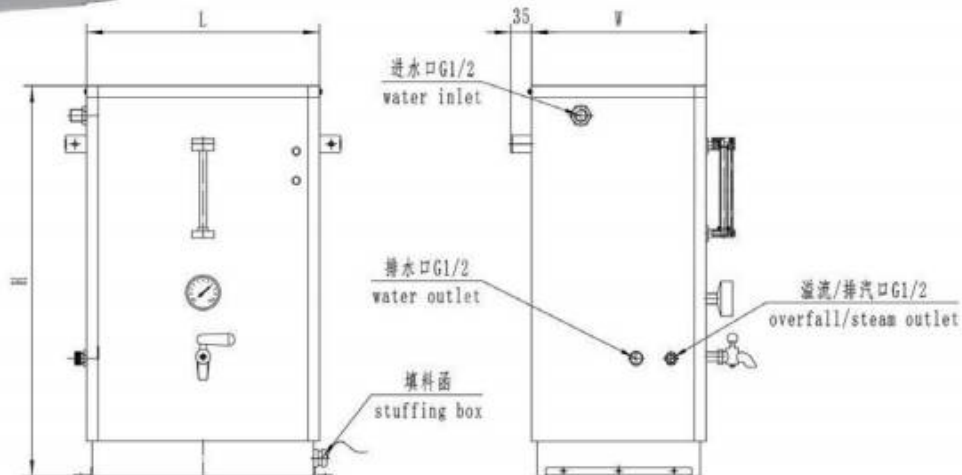

- ◆ 全自动控制，冷热水分开，可24小时连续供水，并设有缺水保护、失水报警、有水保温等功能

The product adopts full automatic control, cold and hot water separation, it can supply water for 24 hours continuously, water-deficiency protecting and warning unit and water temperature keeping unit are installed

- ◆ 具有自动进水、水温显示等功能，表面设有水位指示、温度显示，主体全不锈钢材料，使用方便、安全可靠、清洁卫生

The product have the functions of auto water, water temperature manifestation and so on, and the front piece has water level indication and temperature manifestation. Material of main body is stainless steel, easy to use, safe and reliable, clean health

- ◆ 安装形式可分为落地式、台式、壁挂式等

There are several ways for installation such as floor style, desktop style, wall-hanging style and so on

Diesel Gas Range


燃油汽化灶



YZQ-30-2

- ◆ 采用柴油为燃料，燃油经过气泵增压雾化后燃烧，明火作业，火力强劲。具备煮、烧、炒等多种功能，使用方便、熄火断油、安全可靠。

Diesel Gas Range using diesel oil as fuel, Diesel Oil combusts after the air pump pressured and atomized, Open fire operation, strong fire-power. It has multifunction such as cooking, boiling, stir-frying etc, easy to use, and the oil would cut off as soon as the fire is out, safe and reliable

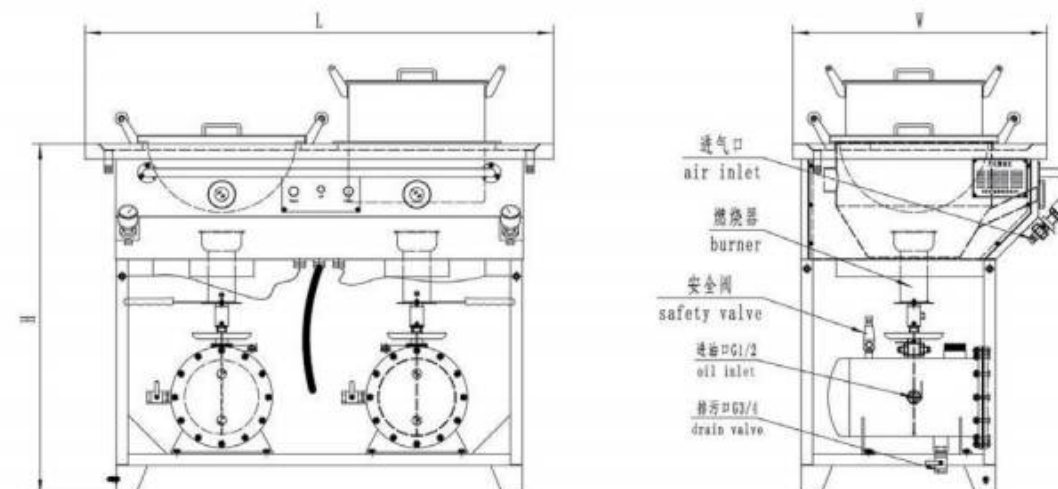

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	储水容积 Water Storage Volume	出水温度 Hot water Temperature	外形尺寸 (L×W×H) External Dimension	重量 Weight
RF-10C	~220V	2kW	10L	≥95℃	300×260×480mm	20kg
RF-30B	3~220V	4.5kW	30L		400×300×670mm	45kg
RF-30C	3~380V		30L		400×300×670mm	30kg
RF-50C	3~440V	3kW	50L		450×300×910mm	50kg
RF-160C	3~220V	6kW	160L		590×400×1140mm	70kg

*以上设备可根据用户要求定制

The product above may be manufactured according to consumer's request

型号 Type	供餐人数 Mealing Person	进气压力 Pressuer (MPa)	电点火电压 Voltage (V)	单眼耗油量 Oil Consumption (kg/h)	外形尺寸 External dimensions (mm)					重量 Weight (kg)
YZQ-30-2	30	0.05~0.25	~220V	3.0	L	H	B	B1	B2	120
YZQ-75	75	0.10~0.35		9.5	1200	900	650	700	450	
YZQ-150	150	0.25~0.40		9.5	1600	900	750	800	550	

*以上设备可根据用户要求定制

The product above may be manufactured according to consumer's request

Kitchen Waste Pulverizer



厨房污物粉碎机




CFJ-15B

- ◆ 全不锈钢结构
All stainless steel structure
- ◆ 将食品残渣和垃圾进行粉碎，便于收集和包装，操作简单方便
Refuse Crasher is used to crash food residues and garbage so as to be easy collecting and packaging, easy to operate
- ◆ 粉碎后的垃圾最大直径小于25mm，不易堵塞管道
The maximum diameter after crashed is less than 25mm, it is not easy to clog the pipe



控制箱
Control Box

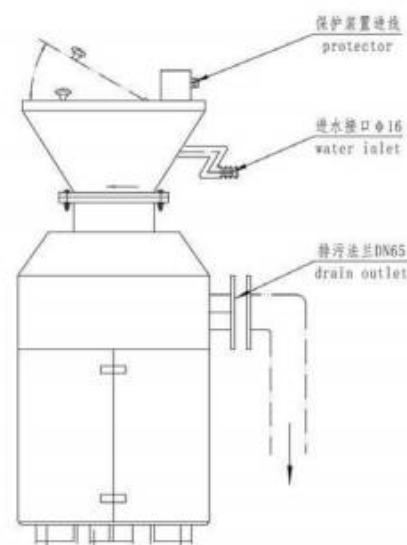

型号 Model	额定电压 Rated Voltage	电机功率 Electric Machinery Power	外形尺寸 (D×H) External Dimension	处理能力 The Work Ability	供水量 Water Supply	重量 Weight
CFJ-15B	~220V 3~220V 3~380V 3~415V 3~440V	1.5kW	Φ380 × 850mm	≤15kg	20L/min	120kg

Kitchen Multi-function Machine





厨房多用机



DYJ-20

- ◆ 集打蛋、搅拌、和面等功能于一体的食品加工机械，不同转速配有相对应功能的搅拌头，可自由更换加工相应食品
Kitchen Multi-Function Machine is a sort of food processing machine with multi-function of dough kneading, eggs mixing, stirring etc. Different speed of revolution match corresponding function stirring head, which can replace processing food freely
- ◆ 不锈钢搅拌桶；可选配不锈钢安全网罩
Stainless steel mixing drum; Stainless steel safety net cover is available

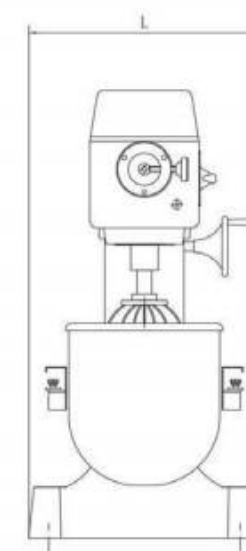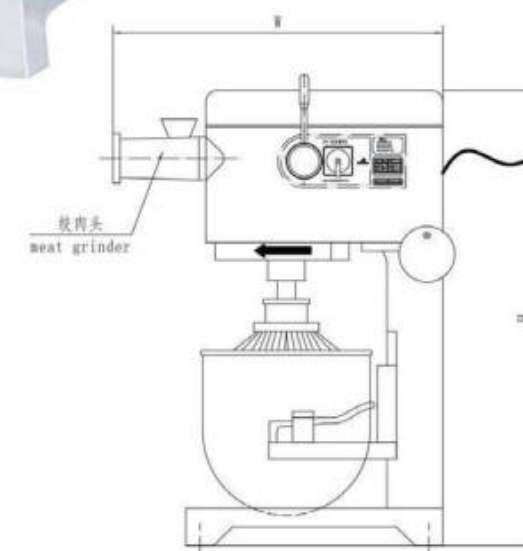

型号 Model	额定电压 Rated Voltage	额定功率 Rated Power	容积 Cubage	外形尺寸 (L×W×H) External Dimension	重量 Weight
DYJ-20	~220V 3~220V 3~380V	0.75kW	20L	415 × 490 × 760mm	110kg
DYJ-50	3~415V 3~440V	1.5kW	50L	505 × 625 × 960mm	140kg

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

*以上设备可根据用户要求定制
The product above may be manufactured according to consumer's request

Combi Oven



万能蒸烤箱



AWE-061L

- ◆ 风力, 热力, 双循环, 快捷, 均匀
Wind, heat, double cycle, quick, uniform
- ◆ 自动化程度高, 高效便捷节省人工
High degree of automation, efficient and convenient, save labor
- ◆ 丰富餐单, 多样选择
Rich menu, multiple choices
- ◆ 气流强劲快速充满整个箱体
The airflow is fast and full of the whole oven
- ◆ 温度精准控制 (正负1度)
Precise control of temperature (plus or minus 1 degrees)
- ◆ 多点探热, 确保温度均匀, 随时监控
Multipoint heating, ensure uniform temperature, monitor at any time

型号 Type	AWE-061L 6层6盘	AWE-101L 10层10盘
电源要求 Power requirements	N-380V AC/50Hz/3PH	N-380V AC/50Hz/3PH
容量 Capacity	6x1/1GN	10x1/1GN
每日烹饪膳食份数 Capacity of meals	50-150	150-250
间距 (毫米) Shelf distance (mm)	70	70
发热管功率 (千瓦) Heat element (kW)	9	16
总功率 (千瓦) Total power (kW)	9.4	16.4
总电流 (安) Total amps required (A)	14	25
空气开关额定电源 (安) Rated current of air circuit breaker (A)	25	40
加热方式 Heating	电加热 Electricity	电加热 Electricity
外形尺寸 (毫米) External dimension (mm)	935x795x830	935x795x1100
内腔入口尺寸 (毫米) Oven internal size (WxHmm)	609x484	609x734
进水管径 (英寸) Water inlet (IN)	3/4" 转为1/2"	3/4" 转为1/2"
排水管径 (毫米) Drain inlet (mm)	42	42
进水压力 (千克/平方厘米) Intel water pressure (Kg/cm ²)	0.2-0.5MPa	0.2-0.5MPa
产品净重 (千克) Weight (Kg)	112.5	132.5
产品毛重 (千克) Packaged weight (Kg)	158	170
包装尺寸·纸箱加木地台 (毫米) Package size (mm)	1080x930x1030	1080x930x1030
工作温度 (摄氏度) Working temperature (°C)	30-290	30-290

*以上设备可根据用户要求定制

The product above may be manufactured according to consumer's request

Stainless Steel Furniture



不锈钢家具

全不锈钢材质, 造型美观, 结构牢固, 家具尺寸和形式可根据用户需要定制。
Steel Furniture is made from stainless steel with beautiful shape and high strength structure. The size and structure of furniture can be determined according to customers' requirements.



The product above may be manufactured according to consumer's request

S/S Furniture

不锈钢家具



洗桌
Washing table



壁柜
Wall cabinet



调味品桌
Condiment table



双眼洗池
2-sink washing tank



集气罩
Gas-collecting hood



碗碟架
Dishes shelf

- ◆ 全不锈钢材质，种类齐全，造型美观，结构牢固
Steel Furniture is made from stainless steel with complete variety, beautiful shape and high strength structure
- ◆ 家具尺寸和形式可根据用户需要定制
The size and structure of furniture can be determined according to customers' requirements

◆ 配餐桌 Pantry table

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A80	800	600	850	双门柜、柜内 1 搁层	54	A80、A100
B80	800	600	850	2 抽屉、双门柜	56	B80、B100、B110
C121	1210	600	850	3 抽屉、3 门 2 柜	86	C121、C139
D150	1500	600	850	4 抽屉、4 门 3 柜	110	D150
E150	1500	600	850	3 门 2 柜、柜内 1 搁层	92	E150
F165	1650	600	850	4 抽屉、4 门 2 柜	112	F165、F183

◆ 工作桌 Working table

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A70	700	600	850	2 抽屉、双门柜	57	A70
B120	1200	800	850	3 抽屉、3 门 2 柜	104	B120
C150	1500	800	850	4 抽屉、4 门 3 柜	128	C150
D150	1500	600	850	3 抽屉、3 门 2 柜	104	D150
E180	1800	600	850	4 抽屉、4 门 2 柜	122	E180、E200
F250	2500	600	850	4 抽屉、4 门 2 柜、中间 2 搁层 (无门)	159	F250
简易型	1200	600	850	下面为方管架	50	

◆ 切菜桌 Chopping table

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A80	800	600	850	1 抽屉、单门柜、右边 2 搁层 (无门)	61	A80
B120	1200	600	850	2 抽屉、2 单门柜、中间 2 搁层 (无门)	92	B120、B150
C150	1500	800	850	2 抽屉、2 单门柜、中间 2 搁层 (无门)	106	C150
D150	1500	750	850	2 抽屉、1 洗池	90	Dy150、Dz150

“y” 表示洗池在右面，“z” 表示洗池在左面

◆ 洗池 Washing tank

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A80	800	600	850	1 洗池	56	Az80、Ay80、Az90、 Ay90、Az100、Ay100
B120	1200	600	850	1 洗池、1 抽屉、单门柜	76	Bz120、By120
C150	1500	600	850	2 洗池、1 抽屉、单门柜	88	Cz150、Cy150
D150	1500	600	850	2 洗池	79	D150、D180
E180	1800	600	850	2 洗池	84	Ez180、Ey180、 Ez200、Ey200
F250	2500	600	850	2 洗池、双门柜	110	Fz250、Fy250
“y”表示洗池在右面，“z”表示洗池在左面						

◆ 壁柜 Wall cabinet

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A80	800	300	600	对开门 1 柜	20	A80、A90
B120	1200	300	600	三开门 2 柜	30	B120

◆ 杯架 Cup shelf

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A90	900	300	600	对开门双层	27	A90
B70	700	250	250	单层无门	9	B70、B80、B90
C70	700	250	500	双层无门	16	C70、C80、C90
D60	600	300	600	双层无门	16	D70、D80、D90
E90	900	300	600	对开门双层、带杯钩	27	E90
F70	700	250	250	单层无门、带杯钩	10	F70、F80、F90
G70	700	250	500	双层无门、带杯钩	17	G70、G80、G90
H60	600	300	600	双层无门、带杯钩	17	H60、H70、H80、H90
I60	700	300	700	带壶钩	15	I70、I80、I90

◆ 碗碟架 Dishes shelf

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A90	900	300	600	单层导杆	20	A90、A120
B90	900	300	600	单层导杆	16	B90、B120
C90	900	300	600	单层导板	20	C90、C120
D60	600	300	600	双层导板	18	D60、D80、D120
E90	900	300	600	单层导杆、带杯钩	20	E90、E120
F90	900	300	600	单层导杆、带杯钩	17	F90、F120
G90	900	300	600	单层导板、带杯钩	21	G90、G120
H60	600	300	600	双层导板、带杯钩	19	H60、H80、H120

◆ 瓶架及调味品架 Bottle shelf & Condiment shelf

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A60	600	300	600	瓶架	12	A60、A80、A90
B56	560	200	200	调味品架	5	B56、B65

◆ 砧板架及和面缸 Block shelf & Floir stirring jar

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A50	500	500	850	砧墩板架及结木无毒砧板	29	A50、A60、A70、A80
B70	700	500	200	和面缸	6	B70
C86	860	650	850	台式和面缸	68	C86

◆ 挂物架 Hooks rack

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks (常规设备型号)
	长 (L)	宽 (B)	高 (H)			
A80	800	500	700	四钢管吊脚	17	A80、A100
B120	1200	500	700	六钢管吊脚	25	B120、B140
C80	800	500	700	四角钢吊脚	23	C80、C100、C120、 C140

◆ 更衣柜 Dressing cabinet

型号 Model	规格 Specification			特征 Characteristic	重量 Weight kg	备注 Remarks
	长 (L)	宽 (B)	高(H)			
	400	500	1800	单门柜	65	

◆ 厨房集气罩 Kitchen hood

型号 Model	规格 Specification			抽风口法兰	重量 Weight kg	备注 Remarks	
	长 (L)	宽 (B)	高(H)				
A1	1000	780	295	120x210	28	——	
A2	1300	860	295	120x280	35	——	
A3	1800	900	295	150x350	47	——	
A4	1000	780	525	150x220	30	——	
A5	1300	860	525	190x280	40	——	
A6	1800	900	525	190x390	55	——	
适用于电灶或烟囱不影响该集气罩安装的其它炉灶。安装在厨房中间部位、也可靠壁安装							
B1	1080	780	450	φ 200	40	——	
B2	1500	800	450		52	——	
B3	1800	900	450		68	——	
适用于电灶或烟囱不影响该集气罩安装的其它炉灶。靠壁安装							
C1	1000	600	200	80x160	38	——	
C2	1200	650	240	100x200	48	——	
C3	1400	700	240	100x250	60	——	
C4	1600	800	240	100x350	72	——	
C5	1800	900	250	100x350	85	——	
适用于带烟囱的各式油灶							
D1	500	250	——	——	8	——	
D2	500	500	——	——	9	——	
无罩体。为单块滤网架。直接安装于甲板或围壁上							
E1	1080	780	450	φ 200	1	40	——
E2	1200	900	450	φ 200	1	48	——
E3	1500	800	450	φ 200	1	52	——
E4	1800	900	450	φ 200	1	68	——
E5	2500	900	450	φ 200	2	85	——
适用于带外接烟囱的汽化油灶。靠壁安装							

Other
Equipment



配套设备

公司除自主设计生产电加热器、智能化节能、厨房电器等设备，还具有全系列船用洗衣、厨房和餐饮等配套设备的供应能力。
In addition to the independent design and production of electric heaters, intelligent energy saving, kitchen appliances and other equipment, the company also has a full range of Marine laundry, kitchen and catering and other supporting equipment supply capacity.



Washing machine



洗衣机

型号 Model	YH6025	YH8002	DG-F100570BE
额定电压 Rated Voltage	220V-50/60Hz	220V-50/60Hz	220V-50/60Hz
功率 Rated Power	2000W	2100W	2000W
洗涤量 Capacity	6.0kg	8.0kg	10.0kg
外形尺寸 External Dimension	595 × 440 × 905mm	600 × 600 × 900mm	600 × 635 × 900mm



Dryer



干衣机

型号 Model	GDZE6-1	GDZ85-58E
额定电压 Rated Voltage	220V/50-60Hz	220V/50-60Hz
功率 Rated Power	1850W	1850W
烘干容量 Capacity	6.0kg	8.5kg
外形尺寸 External Dimension	600 × 560 × 850mm	595 × 600 × 850mm



Washer&dryer



洗干一体机

型号 Model	DG-F80570BH	DG-F100570BH
额定电压 Rated Voltage	220V-50/60Hz	220V-50/60Hz
加热/烘干功率 Rated Power	2000W/1500W	2000W/1500W
洗涤量 Capacity	8.0kg	10.0kg
洗涤/脱水功率 Rated Power	122W/398W	122W/398W
外形尺寸 External Dimension	600 × 580 × 850mm	600 × 635 × 850mm



Industrial washing machine



工业型洗脱机

型号 Model	SXCB-100G	SXCB-150G	SXCB-300G
额定电压 Rated Voltage	380/440V/50(60Hz)	380/440V/50(60Hz)	380/440V/50(60Hz)
加热功率 Rated Power	6kW/3kW	6kW	9kW/15kW
洗涤量 Capacity	10.0kg	15.0kg	30.0kg
外形尺寸 External Dimension	736 × 815 × 1171mm	736 × 946 × 1171mm	953 × 1208 × 1430mm
重量 Weight	300kg	320kg	650kg



Industrial dryer



工业型烘干机

型号 Model	HGCB-240	HGCB-300	HGCB-500
额定电压 Rated Voltage	380/440V/50(60Hz)	380/440V/50(60Hz)	380/440V/50(60Hz)
功率 Rated Power	7.5/12kW	10/15kW	30kW
烘干容量 Capacity	12.0kg	15.0kg	30.0kg
外形尺寸 External Dimension	840 × 821 × 1647mm	840 × 899 × 1647mm	978 × 1230 × 1815mm
重量 Weight	150kg	280kg	400kg



Dish washer



洗碗机

型号 Model	AS- 50	型号 Model	AS- 2
最大洗涤量 Washing Capacity	30/750碟/h	最大洗涤量 Washing Capacity	60/h
洗涤时间 Washing Time	90-180 s	洗涤时间 Washing Time	60-180 s
最大洗涤高度 Washing Height	310mm	最大洗涤高度 Washing Height	420mm
洗涤缸加热功率 Heating Power	3kW	每筛耗水量 Water Consumption Per Sieve	1.5L
电热水炉功率 Electric Water Heater Power	4.5kW	外形尺寸 Dimensions	697×683×1440mm
洗水泵功率 Washing Pump Power	0.6kW	机器净重 Net Weight Of Machine	110kg
水缸容量 Water Tank Capacity	35L	机器自动感应 Automatic Machine Sensing	✓
每筐耗水量 Water Consumption Per Basket	1.5L/筐	HACCP水温警示 Water Temperature Warning	✓
篮筐尺寸 Basket Size	500×500mm	主洗水泵加热功率 Heating Power	3kW
机器净重 Net Weight Of Machine	70kg	主洗水泵功率 Pump Power	0.75kW
外形体积 Shape And Volume	600×601×825mm	内置电热水炉功率 Electric Water Heater Power	9kW
总功率 Total Power	8.0kW	总耗电功率 Total Power Consumption	13kW
供电要求 Power Supply Requirements	380V/440V 50HZ/60HZ	供电要求 Power Supply Requirements	380V/440V 50HZ/60HZ
可选配件 Optional Accessories	药水分配器	可选配件 Optional Accessories	洗涤筐, 药水分配器 不锈钢工作台 不锈钢花洒



Sterilizer



消毒柜

型号 Model	XDZ 130	XDZ300	MC-3
电压 Rated Voltage	220V/1PH	220V/1PH	220V/1PH
功率 Rated Power	0.9kW	1.35kW	2.2kW
容量 Capacity	130L	300L	340L
外形尺寸 External Dimension	464×445×1200mm	555×515×1628mm	650×650×1980mm



Water dispenser



饮水机

型号 Model	WA 500	W 500
额定电压 Rated Voltage	220V/1PH	220V/1PH
功率 Rated Power	1200W	1200W
额定频率 Rated Frequency	50/60Hz	50/60Hz
水桶参数 Bucket Parameters	8.5L+8.5L	17L
出水参数 Effluent parameters	热水30L/H / 冰水 120L/H	冷水30L/H / 常温水 120L/H
外形尺寸 External Dimension	410x320x1000mm	410x320x1260mm
备注 Remarks	冰热两用	单冰水



Potato peeler



土豆去皮机

型号 Model	PP- 8	HLP- 15
额定电压 Rated Voltage	220V/1PH	220V/1PH
功率 Rated Power	600W	750W
容量 Capacity	8kg	15kg
外形尺寸 External Dimension	390×390×745 mm	407×586×1090mm



Meat slicer



斜刀切片机

型号 Model	MS250	MS300
额定电压 Rated Voltage	220V/1PH	220V/1PH
功率 Rated Power	150W	250W
刀片直径 Blade diameter	Φ250	Φ300
外形尺寸 External Dimension	520×470×390mm	630×530×470mm



Meat mincer



绞肉机

型号 Model	TJ-12F	TJ-22F
额定电压 Rated Voltage	220V	220V
额定频率 Rated Frequency	50Hz	50Hz
电机功率 Power	0.85kW	1.1kW
生产能力 Capacity	120kg/h	200kg/h
外形尺寸 External Dimension	410 × 228 × 420mm	410 × 240 × 450mm



Bone saw



锯骨机

型号 Model	HLS-1650
额定电压/功率 Rated Voltage / Power	220V/750W
锯轮直径 Wheel Diameter	211mm
锯条长度 Saw Length	1660mm
净重 Net Weight	42.6kg
外形尺寸 External Dimension	465 × 454 × 870mm



Dough kneading machine



和面机

型号 Model	HS 20	HS 30	HS 50
电压 Voltage	220V/380V/440V 50/60Hz	220V/380V/440V 50/60Hz	380V/440V 50/60Hz
电机功率 Power	1.5kW	1.5kW	2.2kW
和面量 Mixing Limited	≤8 kg	≤12 kg	≤22 kg
和面时间 Time Of Mixing	10-12 min	12-18 min	12-18 min
机器尺寸 Size	700 × 500 × 770mm	700 × 550 × 850mm	880 × 530 × 920mm
净重 Net Weight	77kg	87kg	150kg



Refrigerator



冰箱

型号 Model	BC-50/117	BCD-360/460	BCD-1000/1500	BCD-2000
电制 Rated Voltage	220V/39W/50-60Hz 220V/1PH/50-60Hz	220V/180W/50/60Hz 220V/220V/50/60Hz	220V/50/60Hz	220V/50/60Hz
冷藏 Refrigeration	-	+5~-4℃	+5~-4℃	+5~-4℃
冷冻 Freezing	-	-5~-15℃	-5~-15℃	-5~-15℃
容量 Capacity	50/117L	360/460L	1000/1500L	2000L
外形尺寸 External Dimension	500 × 515 × 530mm 510 × 499 × 860mm	600 × 600 × 1965mm 680 × 600 × 1965mm	1220 × 760 × 1965mm 1837 × 760 × 1965mm	1837 × 820 × 1960mm



Refrigeration / Freezing table counter



冷藏/冷冻工作台

型号 Model	WR15	WF15
电制 Rated Voltage	220V/50Hz	220V/50Hz
功率 Power	140W	170W
容积 Volume	390L	390L
制冷方式 Refrigeration Mode	直冷	直冷
温度范围 Temperature Range	-5~+4℃	-3~-15℃
制冷剂 Cryogen	R134a	R134a
外形尺寸 External Dimension	1500 × 750 × 800mm	1500 × 750 × 800mm



型号 Model	WR18	WF18
电制 Rated Voltage	220V/50Hz	220V/50Hz
功率 Power	190W	200W
容积 Volume	500L	500L
制冷方式 Refrigeration Mode	直冷	直冷
温度范围 Temperature Range	-5~+4℃	-3~-15℃
制冷剂 Cryogen	R134a	R134a
外形尺寸 External Dimension	1800 × 750 × 800mm	1800 × 750 × 800mm



Ice maker



制冰机

型号 Model	ZH-85Y
电压 Rated Voltage	220V
功率 Rated Power	360W
储冰量 Ice Storage	18kg
外形尺寸 External Dimension	500 × 460 × 820mm
制冷剂 Cryogen	R22/R134A



Microwave oven



微波炉

型号 Model	G70F23N
电压 Rated Voltage	220V
微波功率 Microwave Power	800W
烧烤功率 Barbecue Power	700W
容积 Volume	23L
外形尺寸 External Dimension	350 × 480 × 280mm



Coffee machine



咖啡机

型号 Model	RH-330
电压 Rated Voltage	220V-240V
功率 Rated Power	2.1kW
外形尺寸 External Dimension	419 × 219 × 478mm
净重 Net Weight	5kg



Toaster



多士炉

型号 Model	4ATS	6ATS
电压 Rated Voltage	220V-240V	220V-240V
功率 Rated Power	2.24kW	3.24kW
外形尺寸 External Dimension	370 × 210 × 225mm	460 × 210 × 225mm
净重 Net Weight	5Kg	6Kg



Marine garbage baler



船用垃圾打包机

型号 Model	15SS
电压 Rated Voltage	220V-50/60Hz
压缩机 Compressor	1360.5Kg
功率 Rated Power	660W
容量 Capacity	43.9L
压缩比 Compression Ratio	6:1
净重 Net Weight	70.7Kg



型号 Model	CH2A02M
体积 Volume	1677 × 556 × 555mm
工作室容积/垃圾箱体积/ 压缩后垃圾体积 Working Room Volume/ Dustbin Volume/ Waste Volume After Compression	0.20m3/0.095m3/0.070m3
电源 Power Supply	220VAC/50HZ、230VAC/60HZ、380VAC/50HZ 440VAC/60HZ、110VAC/50HZ
液压动单力单元 Hydraulic Single Force Unity	1500W
压力/最大压力 Pressure/ Maximum Pressure	2000KG-3000KG
机体材料/垃圾压缩材料 Body Material/ Waste Compression Material	不锈钢/不锈钢
压缩周期 Compression Period	60S
压缩比 Compression Ratio	10:1-20:1
压缩后体积 Volume after Compression	约70L
整机重量 Overall Weight	200KG
垃圾包重量 Garbage Bag Weight	30KG-45KG



销售网络 Distribution Network



我们的客户

OUR CUSTOMER



布局未来 走向世界
DEPLOY THE FUTURE
ADVANCE TO THE WORLD